



XA 单级单吸离心泵

SINGLE STAGE CENTRIFUGAL PUMP

概述

产品执行标准：Q/GZGY 7

XA 型泵供吸送清水及物理化学性质类似水的液体，适用于工厂、矿山、城市供水、空调系统，消防系统以及农业灌溉。对于同一种规格的泵，改变叶轮的外径可有不同的性能（在型号后面加上A、B、C等字母表示，见型号意义）。该泵结构简单、性能可靠、体积小、重量轻、吸程高、低能耗、维修容易。

XA 型泵通用互换性强，全系列124种规格，但只用8种轴；同一规格的轴、轴承、轴套、叶轮的紧固件等 均能互换。全系列的悬架规格只有7种。

泵的转速分为2900r/min和1450r/min两级

	2900r/min	1450r/min
最大流量	100L/s	150L/s
最大扬程	100m	55m
最大转速	3500r/min(用于60Hz)	3500r/min(用于60Hz)
最高使用温度	105 (由机械密封的型号决定)	105 (由机械密封的型号决定)
最低使用温度	- 10	- 10
最大工作压力	1MPa(如需要1.6.MPa时，请在合同中注明)	1MPa(如需要1.6.MPa时，请在合同中注明)

DESCRIPTION

Applicable standard: Q/GZGY 7

XA pumps are used for pumping water or liquid which the characteristic of chemical and physical is similar to water. They are suitable for plants, mine, city water supply, air-conditioning, firefighting and irrigation. For the same model, the performance can be changed by cutting their diameter of impeller (which is indicated as the letter A, B or C at the end of model name). They are simple structure, reliable performance, small sizes, light weight, high head, low power consumption and easy maintenance.

XA pumps have a wonderful interchangeable character, they are 124 models and three shaft sizes, for the same specifications, shaft, bearing, shaft seal, impeller fastening are interchangeable. There are 4 sizes for bearing housing for all XA pumps.

The speed available is 2900 rpm or 1450rpm.

	2900r/min	1450r/min
Capacity(Max.)	100L/s	150L/s
Head (Max.)	100m	55m
Speed(Max.)	3500r/min(Used under 60Hz)	3500r/min(Used under 60Hz)
Temperature(Max.)	105 (Depend on the type of the mechanical seal.)	105 (Depend on the type of the mechanical seal.)
Temperature(Min.)	- 10	- 10
Operating Pressure(Max.)	1MPa(If 1.6.MPa is required, indicate in the order)	1MPa(If 1.6.MPa is required, indicate in the order)

中外材料对照表

PRINCIPLE PARTS LIST AND MATERIAL IDENTIFICATION

零件名称 Parts Name	材料名称 Materials Name	中国 China	英国 UK	日本 Japan
		GB	BS	JIS
泵体 Pump casing	灰铸铁 Grey cast iron	HT200	Cr.180	FC20
	球墨铸铁 Nodular cast iron	QT500 - 7	Cr.500 - 7	FCD50
叶轮 impeller	灰铸铁 Grey cast iron	HT200	Cr.180	FC20
	锡青铜 Bronze	ZCuSn5pb5Zn5	LG2	BC6
	不锈钢 Stainless steel	2Cr13	420S37	SUS420J1
		0Cr18Ni9	304S15	SUS304
轴 Shaft	不锈钢 Stainless steel	2Cr13	420S37	SUS420J
	铬钢 Chrome steel	40Cr	En18S117	SCr4
轴套 Shaft sleeve	不锈钢 Stainless steel	2Cr13	420S37	SUS420J1
密封环 Wearing	灰铸铁 Grey cast iron	HT200	Cr.180	FC20
	锡青铜 Bronze	ZCuSn5pb5Zn5	LG2	BC6

用户可根据使用的需要选用泵过流部件的零件材料,在合同中说明
When ordering the goods, please indicate the materials to be used for wet components according to their requirement

结构说明

- 该泵为后开式结构，拆开泵盖和旋转部件时无需移动和拆卸管路。泵悬架内装有两个球轴承，用机器油或油脂润滑。
- 泵通过弹性联轴器有电动机直接驱动。
- 泵的进出口法兰、涡壳、泵脚都铸为一体。
- 泵壳、叶轮、泵盖由铸铁制造，泵轴由高密度碳钢，采用机械密封或填料密封。轴套材料是不锈钢。作为悬架的辅助支撑，支架是用碳钢制造。

CONSTRUCTION DETAILS (见图1 see fig.1)

The pumps are back-pull-out design, which allows disassembling the casing cover and rotation components without removing the pipelines. There are 2 ball bearings in the bearing housing. They are grease or oil lubrications.

The pumps and motors are connected by flexible couplings.

The suction and discharge flange, the casing and pump feet are cast together.

The volute casing, impeller and the casing cover are made of cast iron, the shafts are made of high tensile steel, they are packing seal or mechanical seal, the shaft sleeves are made of stainless steel, the support feet are made of carbon steel.

XA 型单级单吸离心泵 SINGLE STAGE CENTRIFUGAL PUMP

2

XA型离心泵结构图 Stucture Of Pump


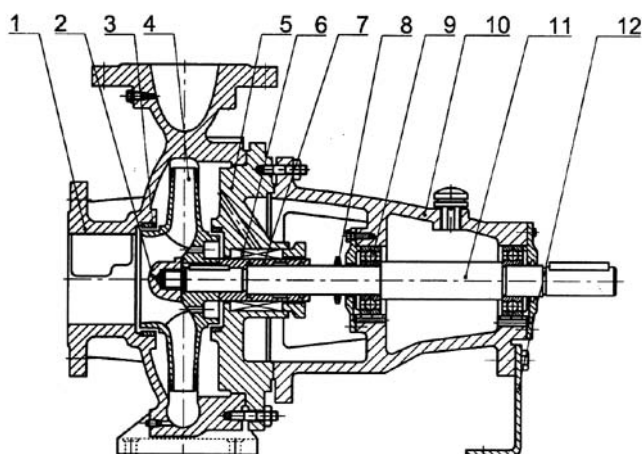


图1 fig.1

序号 NO.	零件名称 Name
1	泵壳 Volute casing
2	叶轮螺母 Impeller nut
3	密封环 wear ring
4	叶轮 Impeller
5	泵盖 Casing cover
6	填料或机械密封 Packing or mechanical seal
7	轴套 Shaft sleeve
8	挡水圈 Slinger
9	轴承 Bearing
10	悬架 Bearing house
11	泵 Shaft
12	支架 Support foot





XA 型泵性能范围 CHART OF XA PUMP PERFORMANCE RANGE

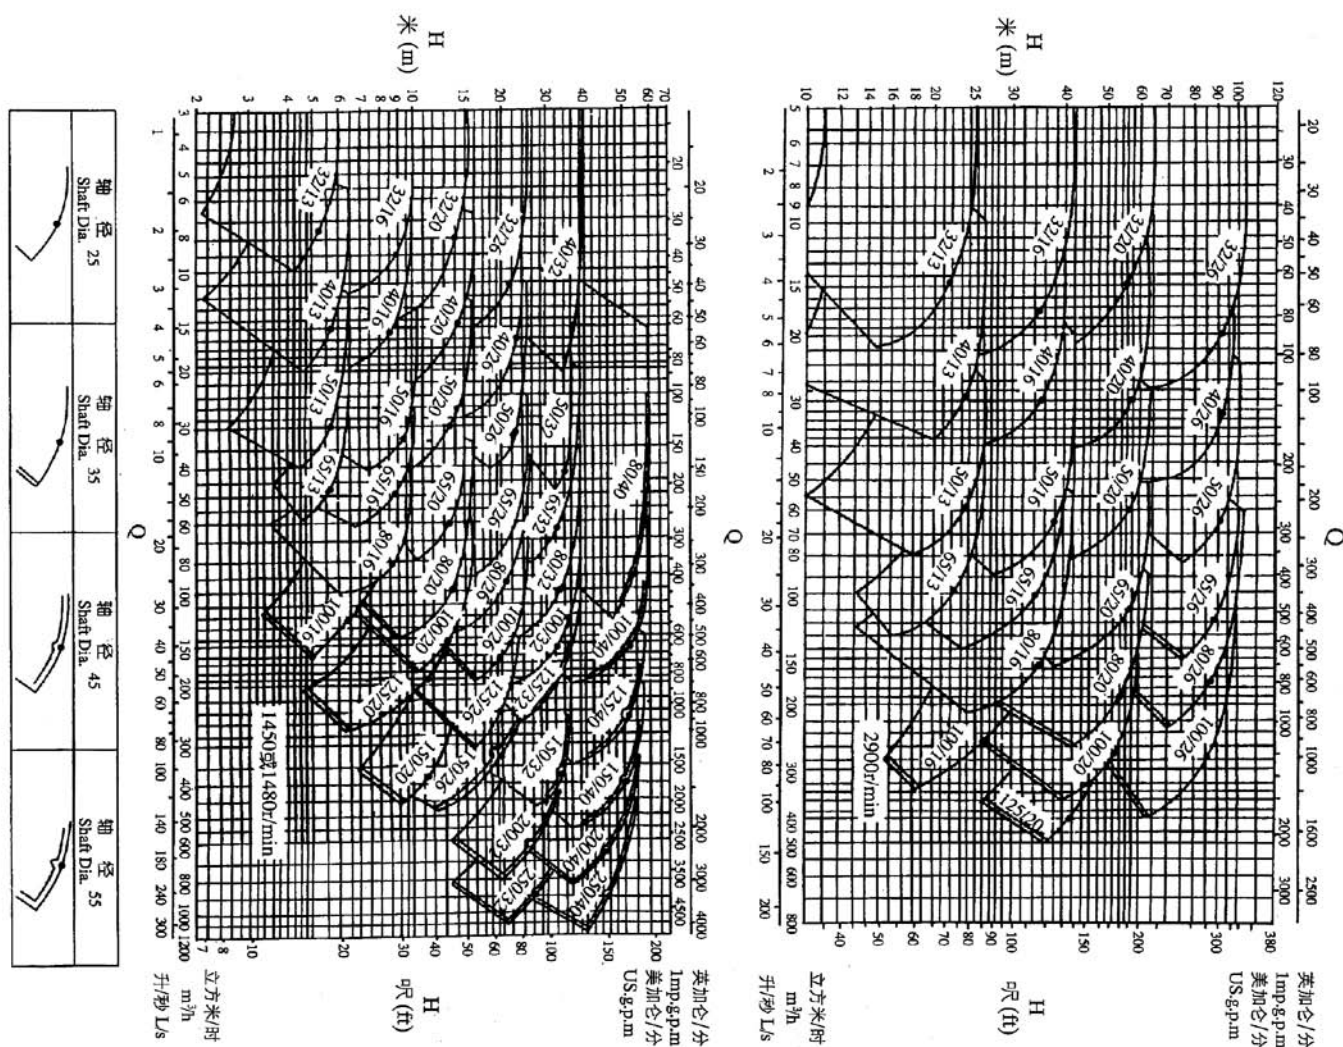

注：250/32，250/40 转速 n=1480r/min

Note: In case of 250/32, 250/40, the speed n=1480r/min.


(n=2900rpm)

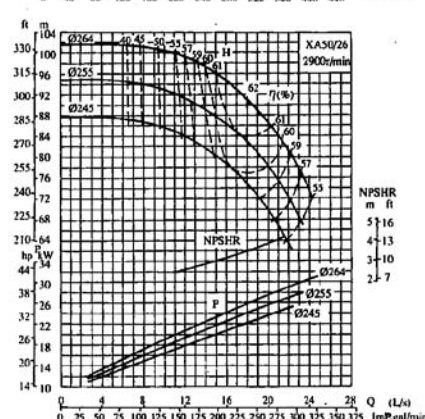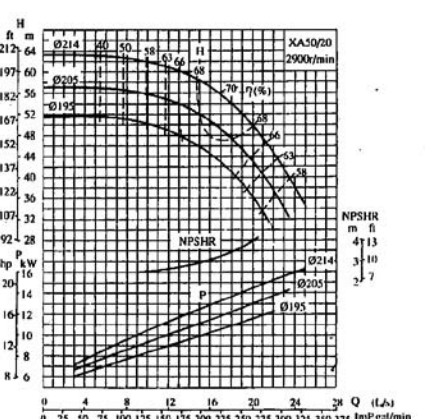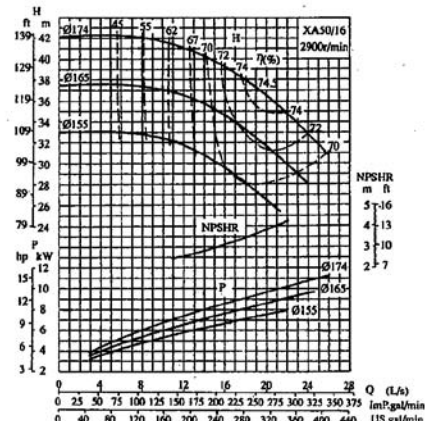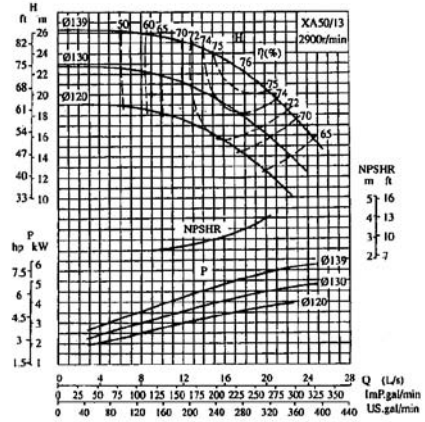













XA 型单级单吸离心泵 SINGLE STAGE CENTRIFUGAL PUMP

4













性能曲线 PERFORMANCE CURVES (n=2900rpm)

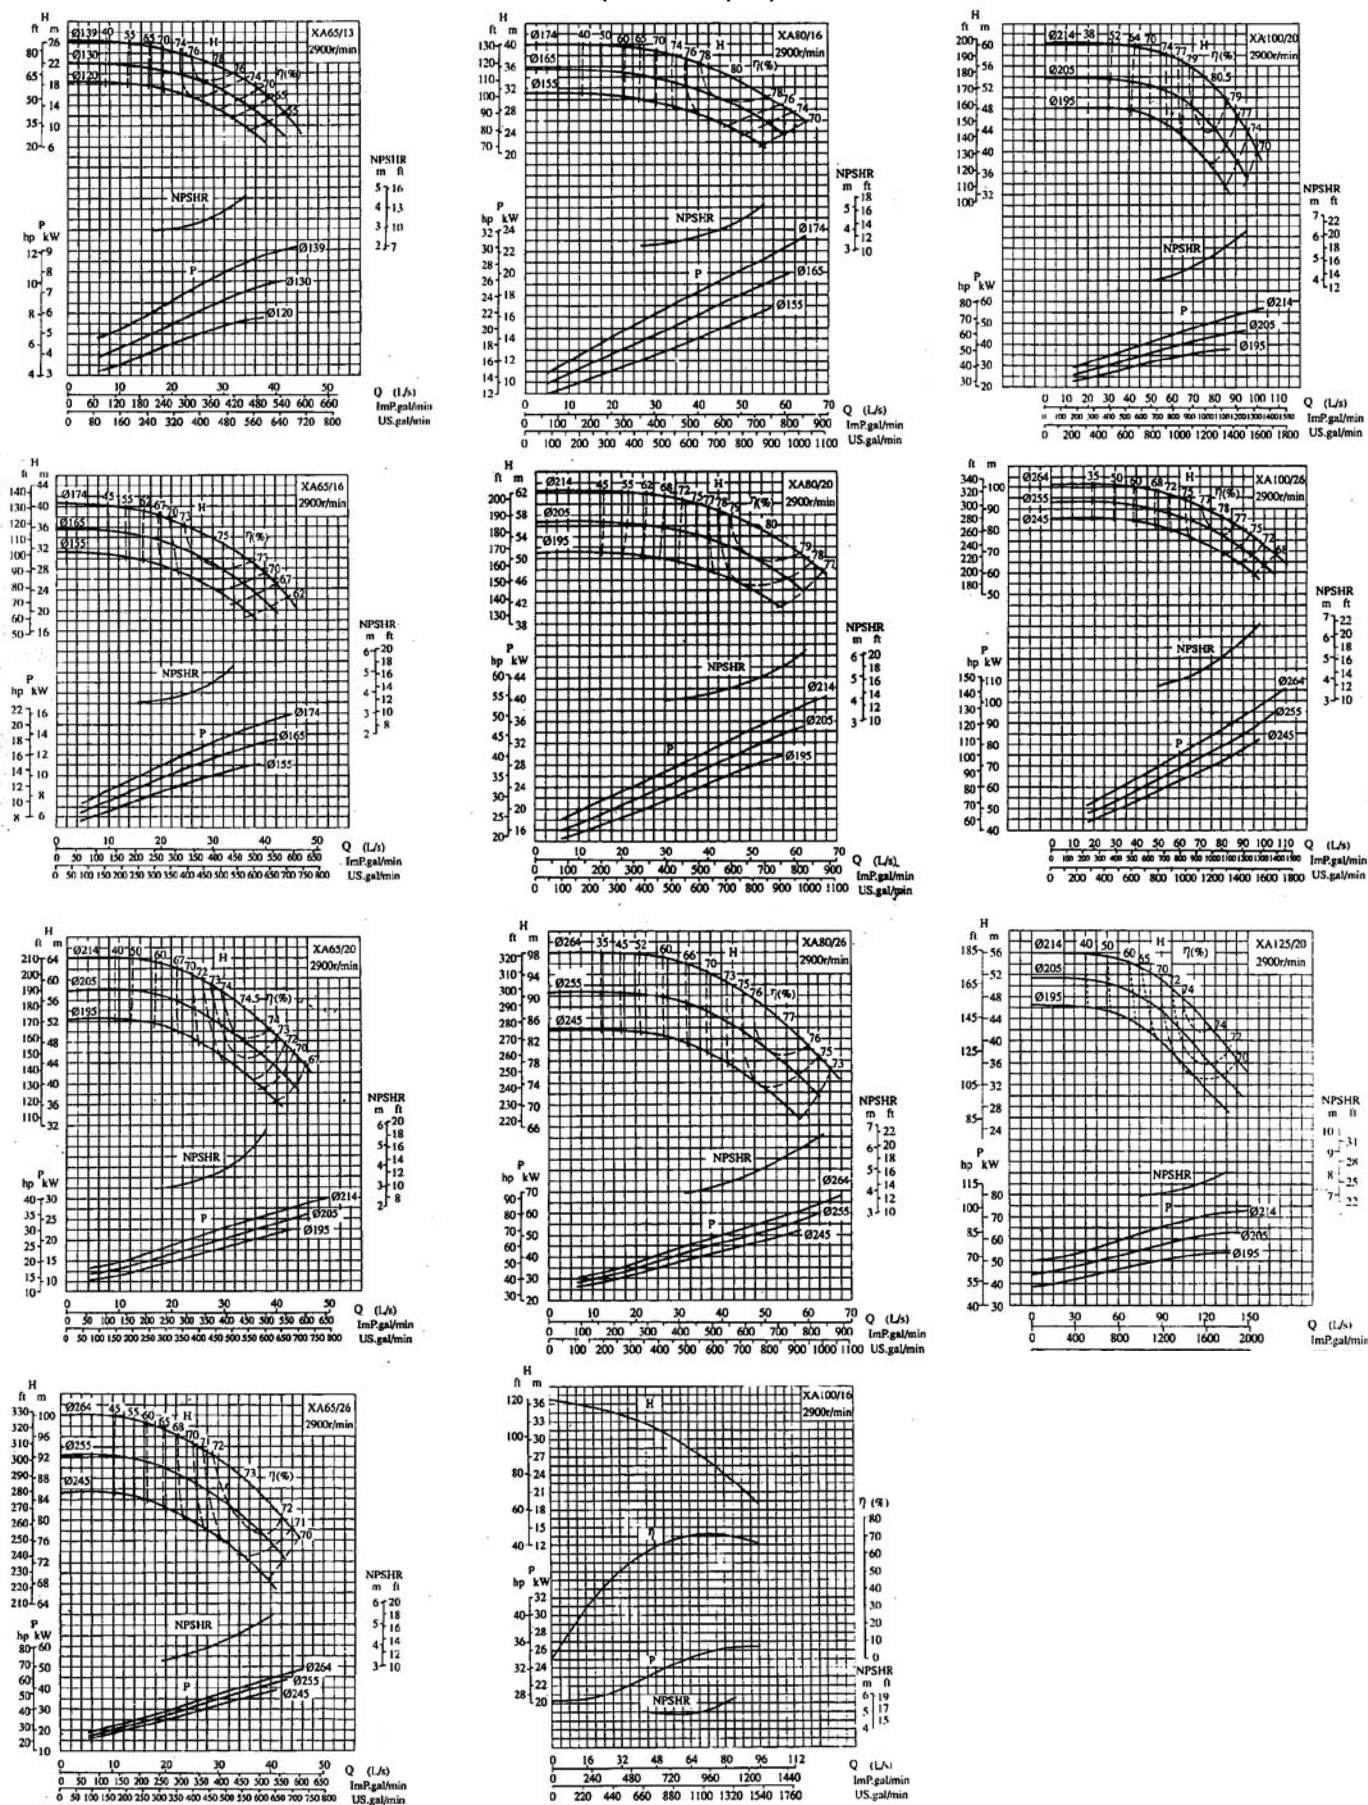

性能曲线 PERFORMANCE CURVES (n=1450rpm)

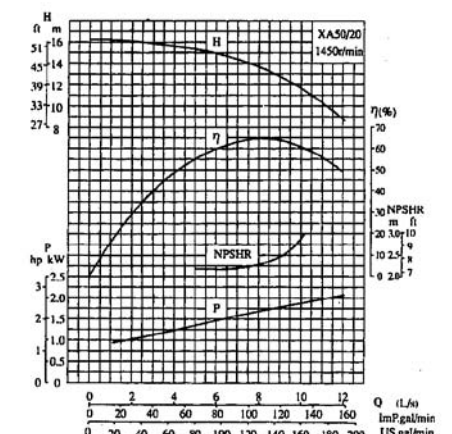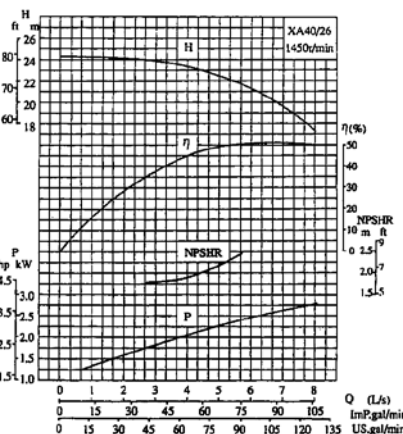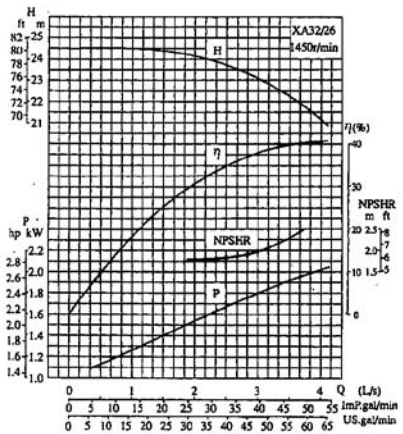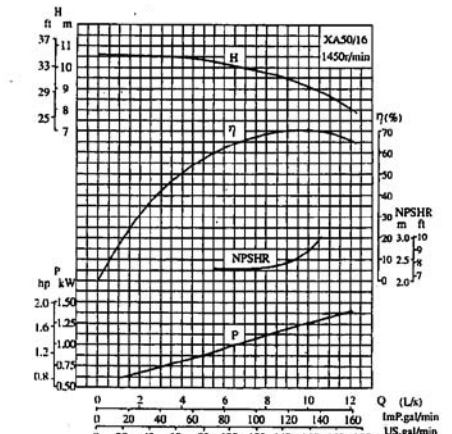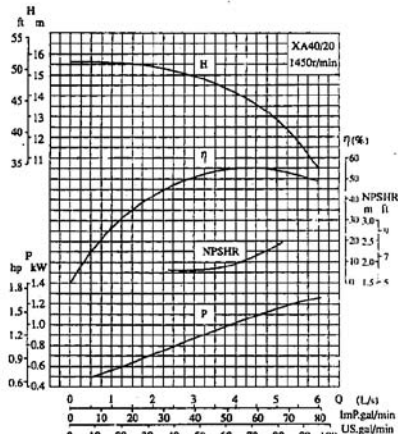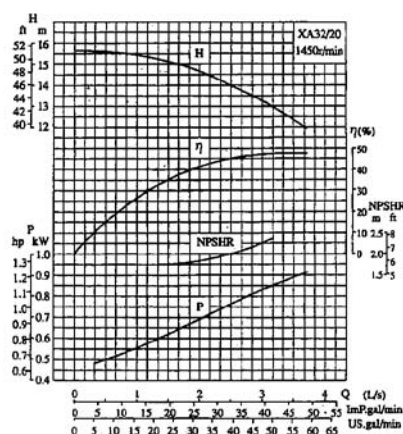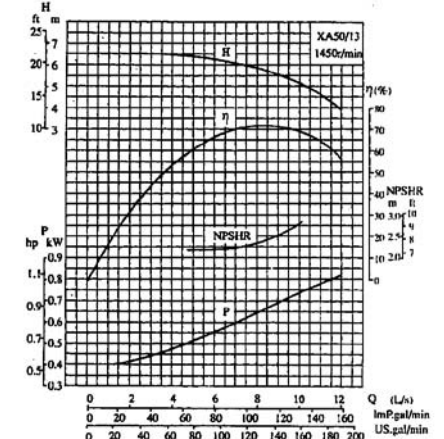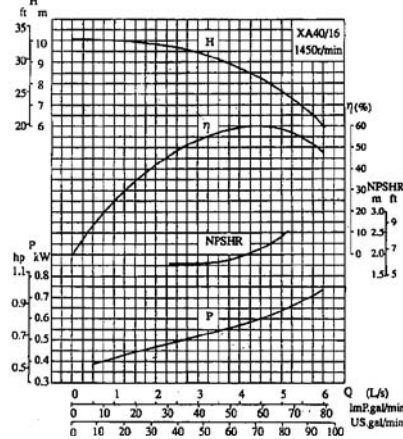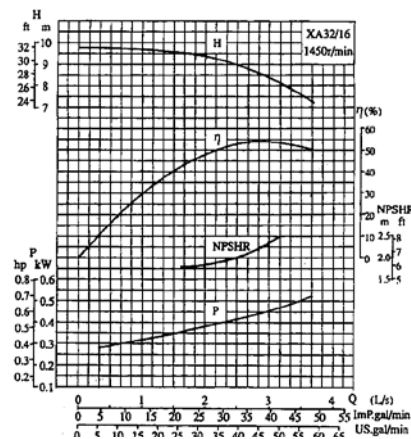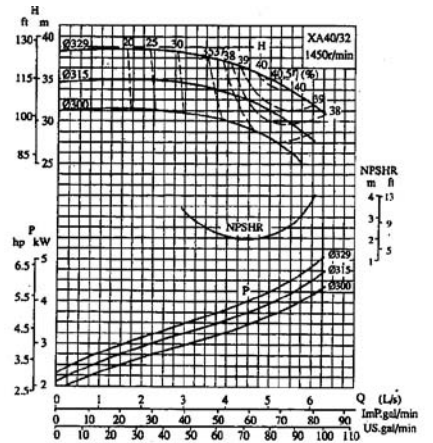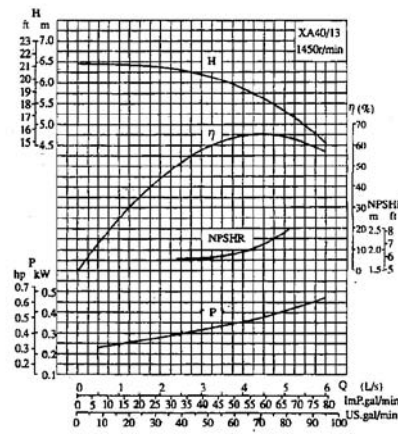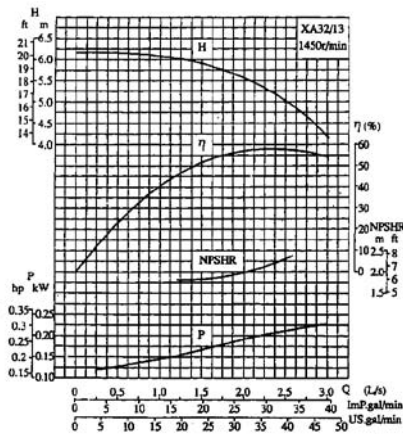


性能曲线 PERFORMANCE CURVES (n=1450rpm)

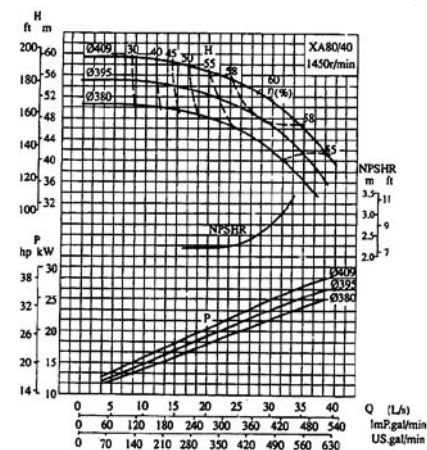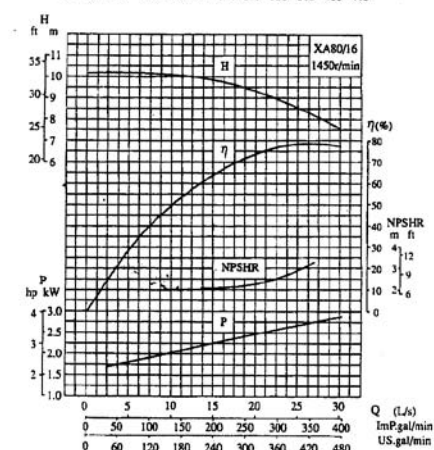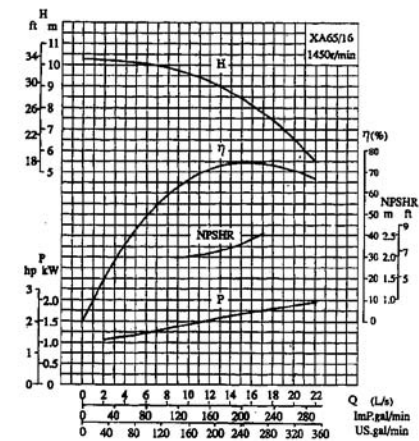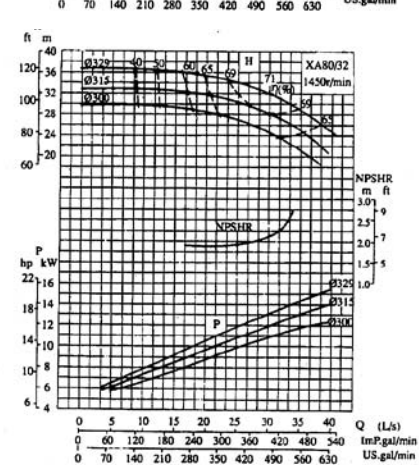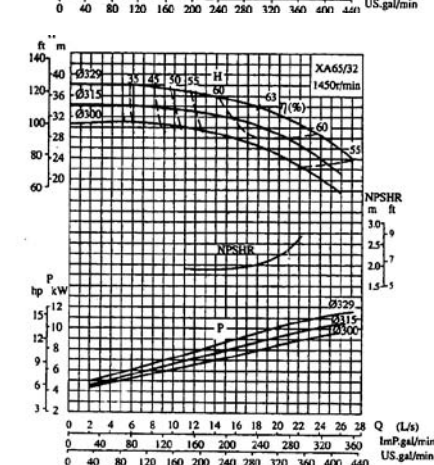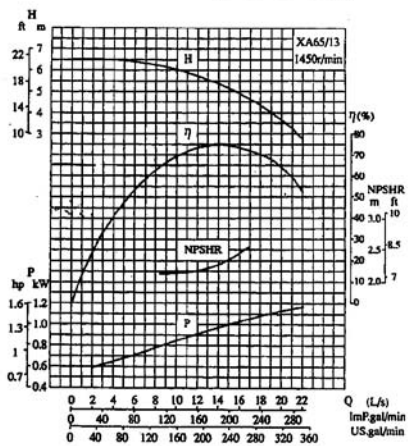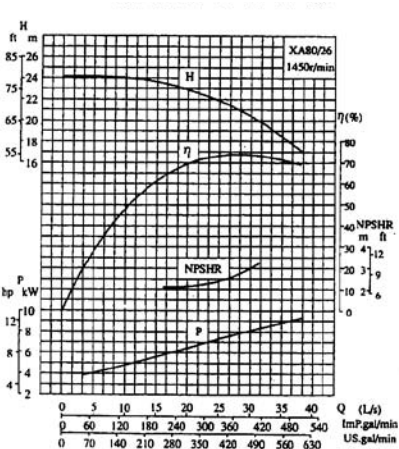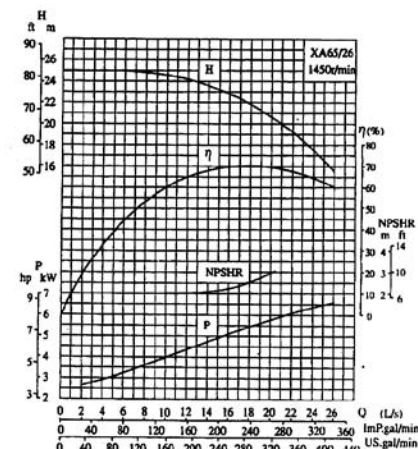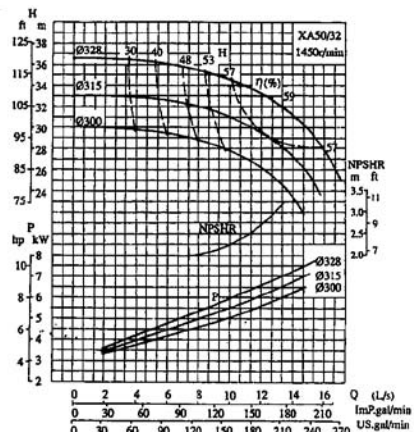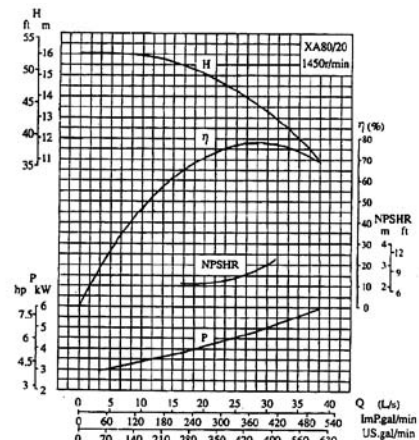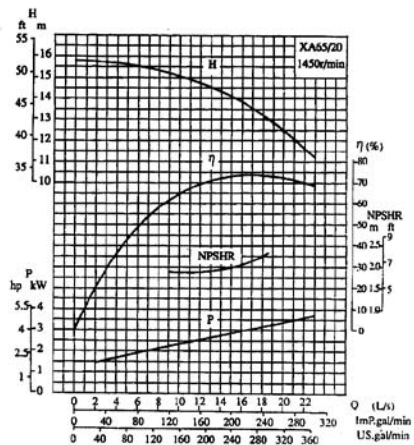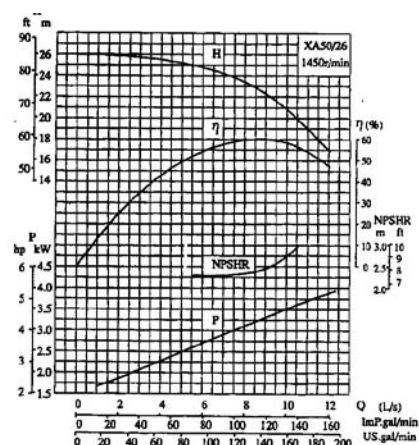


XA 型单级单吸离心泵 SINGLE STAGE CENTRIFUGAL PUMP

7

性能曲线 PERFORMANCE CURVES (n=1450rpm)

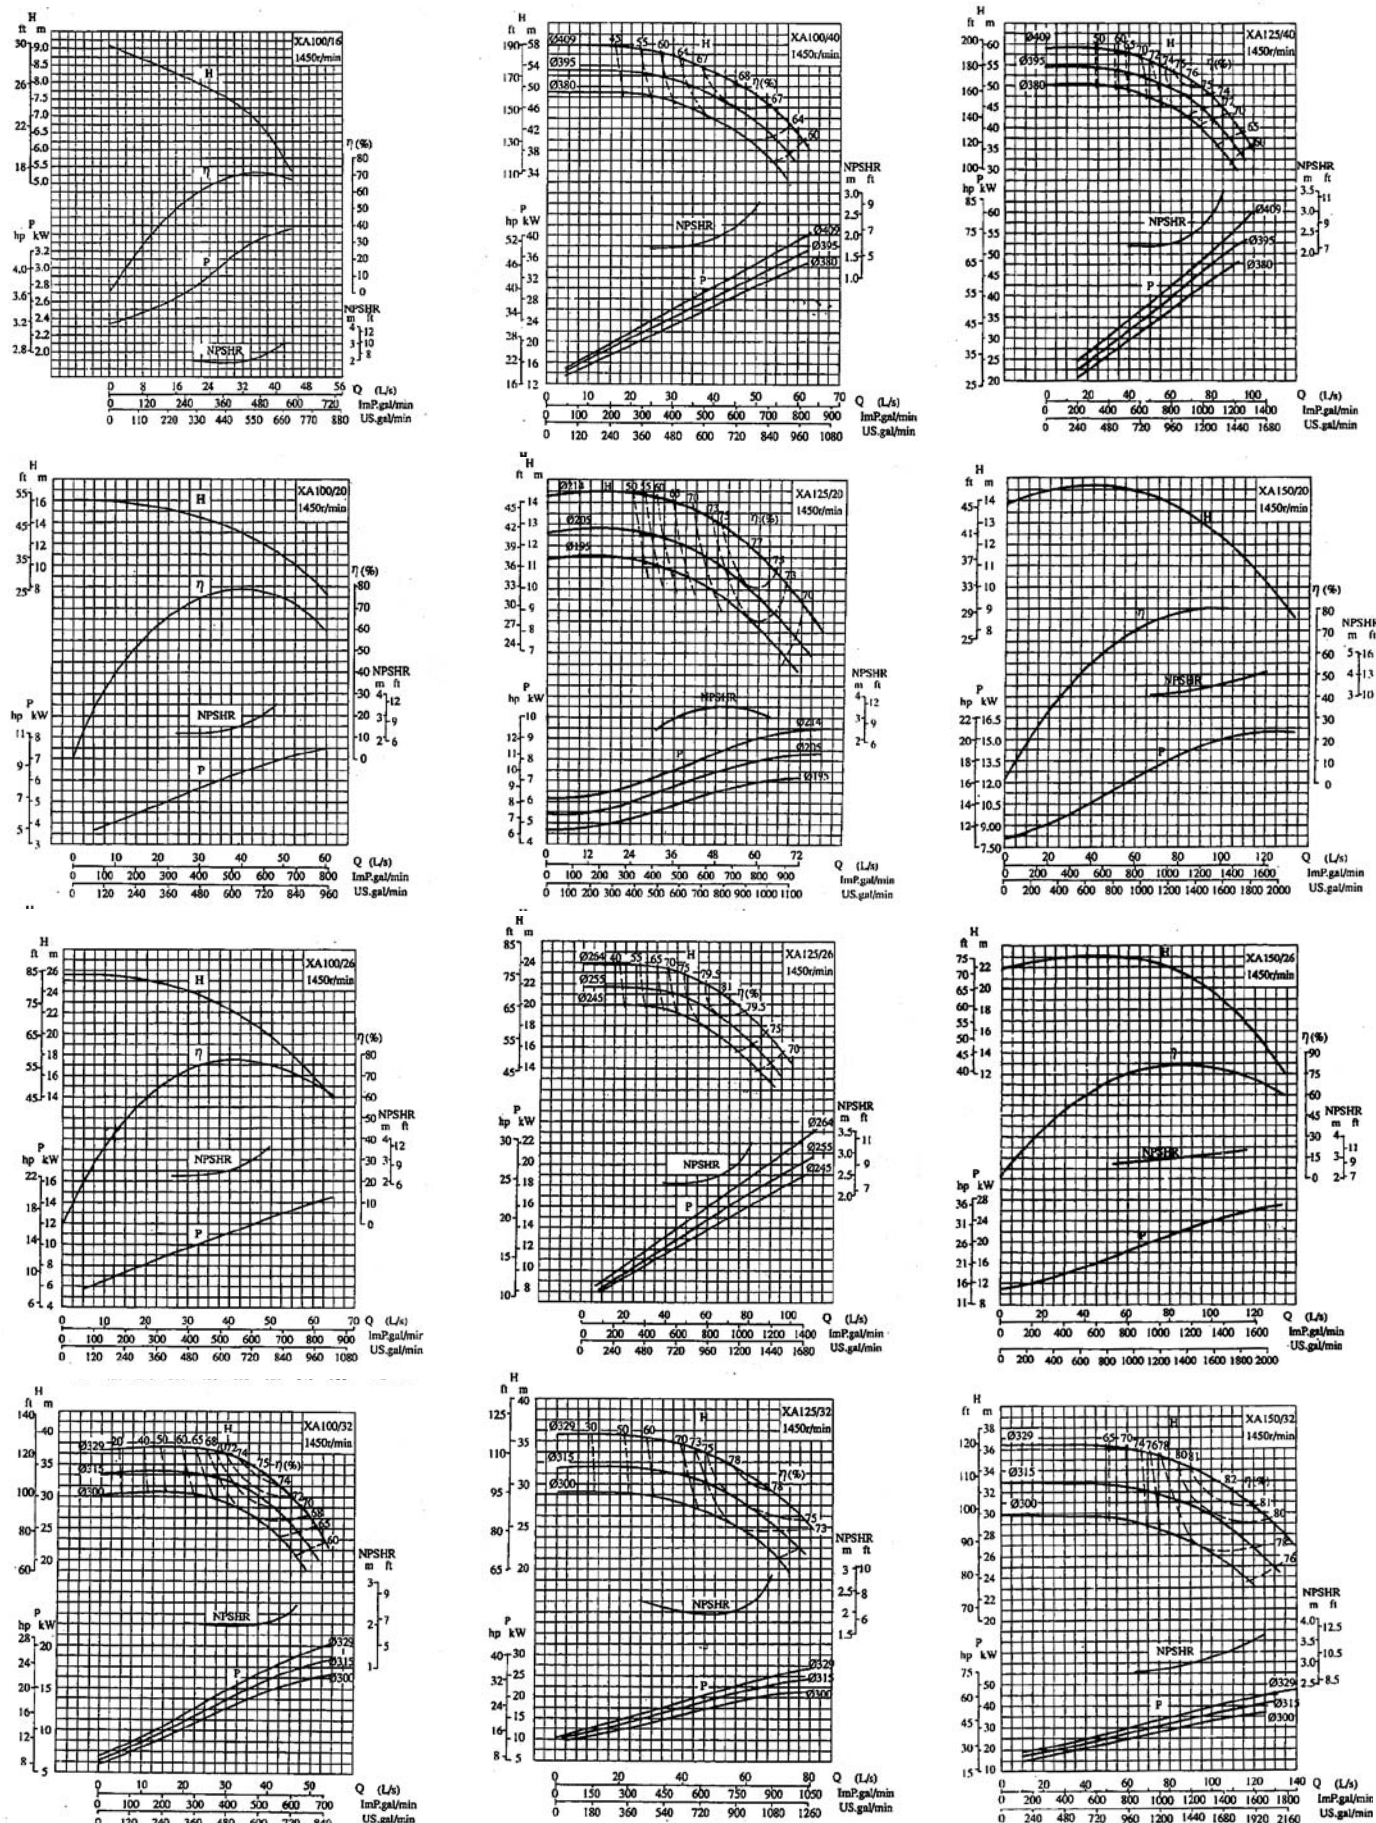

性能曲线 PERFORMANCE CURVES (n=1450rpm)

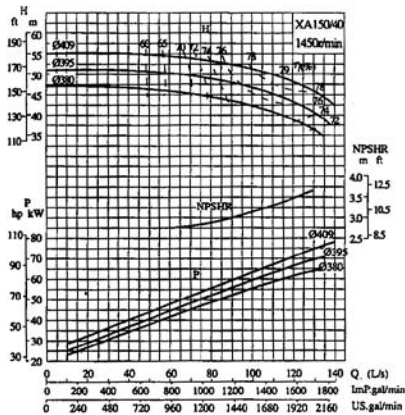

性能表 PERFORMANCE TABLE n=2900rpm

型号 Model	流量 Capacity Q		扬程 Head H (m)	转速 Speed n (rpm)	功率 Power P (kW)		电机型号 Motor supplied (kW)	泵效率 Eff. η (%)	必需汽 蚀余量 (NPSH)r (m)	叶轮直径 Impeller diameter (mm)	泵口径 Pump nozzle diameter (mm)		锥管直径 Tape pipe diameter (mm)		重量 Weight (kg)
	m³/h	L/s			轴 Shaft	电机 Motor					In	Out	In	Out	
XA32/13	9 15 18	2.5 4.17 5	24.5 22 20.2	2900	1.23 1.47 1.58	1.5 2.2 2.2	Y90L-2 2.2kW	49 61 62	1.8 2 2.5	Φ139	50	32		50	27.5
XA32/13A	8.5 14 17	2.36 3.89 4.72	21.2 19 17.2	2900	1.04 1.23 1.31	1.5 1.5 2.2	Y90L-2 2.2kW	47 59 60.5	1.8 1.95 2.3	Φ130	50	32		50	27.5
XA32/13B	7.8 13 15.5	2.17 3.61 4.31	19 16.2 14.7	2900	0.89 1.01 1.07	1.1 1.1 1.5	Y90S-2 1.5kW	43 56.5 58	1.8 1.88 2.08	Φ120	50	32		50	27.5
XA32/16	11 18 22	3.05 5.0 6.11	40 37 34	2900	2.49 3.18 3.51	3 4 5.5	Y132S1-2 5.5kW	48 57 58	1.9 2.0 2.4	Φ174	50	32		50	35
XA32/16A	10.5 17 21	2.92 4.72 5.83	35.7 33 30	2900	2.22 2.78 3.06	3 3 4	Y112M-2 4kW	46 55 56	1.9 1.95 2.2	Φ165	50	32		50	35
XA32/16B	9.8 16 19.5	2.72 4.44 5.42	31.4 29 26.5	2900	1.93 2.38 2.61	2.2 3 4	Y112M-2 4kW	43.5 53 54	1.9 1.95 2.2	Φ155	50	32		50	35
XA32/20	11 18 22	3.05 5 6.11	63 59 55.5	2900	4.71 5.9 6.52	5.5 7.5 11	Y160M-2 11kW	40 49 51	1.8 2 2.2	Φ214	50	32		50	41
XA32/20A	10.5 17 21	2.92 4.72 5.83	57.2 54 50.2	2900	4.24 5.26 5.79	5.5 7.5 7.5	Y132S2-2 7.5kW	38.6 47.5 49.5	1.8 1.95 2.2	Φ205	50	32		50	41
XA32/20B	10 16.5 20	2.78 4.58 5.56	51.5 48 45	2900	3.69 4.5 5.03	5.5 7.5 7.5	Y132S2-2 7.5kW	38 46.8 46.8	1.8 1.9 2.15	Φ195	50	32		50	41
XA32/26	14 22 26	3.89 6.11 7.22	99 95 92	2900	11.27 13.23 14.47	15 15 18.5	Y160L-2 18.5kW	33.5 43 45	2.1 2.2 2.6	Φ264	50	32		50	59
XA32/26A	13.5 21 25	3.75 5.83 6.94	91.8 88 85	2900	10.75 12.58 13.6	15 15 15	Y160M2-2 15kW	31.4 40 42.5	2.1 2.2 2.5	Φ255	50	32		50	59
XA32/26B	13 20.5 24	3.61 5.69 6.67	84.5 81 78.4	2900	9.97 11.74 12.63	15 15 15	Y160M2-2 15kW	30 38.5 40.6	2.15 2.16 2.38	Φ245	50	32		50	59
XA40/13	18 30 36	5 8.33 10	25.5 23.5 21.5	2900	2.08 2.74 3.03	2.2 3 4	Y112M-2 4kW	60 70 69.5	1.8 2 2.4	Φ139	65	40		65	30
XA40/13A	16.8 28 33.6	4.67 7.78 9.33	22 20.2 18.8	2900	1.8 2.3 2.56	2.2 3 4	Y112M-2 4kW	56 67 67.2	1.8 2 2.25	Φ130	65	40		65	30
XA40/13B	15.5 26 31	4.31 7.22 8.61	18.5 17 15.5	2900	1.48 1.85 2.01	1.5 2.2 3	Y100L-2 3kW	53 65 65	1.8 1.9 2.15	Φ120	65	40		65	30
XA40/16	18 30 36	5 8.33 10	39.5 35 31.5	2900	3.65 4.47 4.9	5.5 5.5 7.5	Y132S2-2 7.5kW	53 64 63	2.1 2.5 3.6	Φ175	65	40		65	36
XA40/16A	17 28.5 34	4.72 7.92 9.44	34.8 30.5 27.6	2900	3.16 3.82 4.19	4 5.5 5.5	Y132S1-2 5.5kW	51 62 61	2.1 2.5 3.25	Φ165	65	40		65	36
XA40/16B	16 26.5 32	4.44 7.4 8.89	30.5 27 24	2900	2.77 3.29 3.55	4 4 4	Y112M-2 4kW	48 59.5 59	2.05 2.4 2.9	Φ155	65	40		65	36

XA 型单级单吸离心泵 SINGLE STAGE CENTRIFUGAL PUMP

9

性能表 PERFORMANCE TABLE

n=2900rpm

型号 Model	流量 Capacity Q		扬程 Head H (m)	转速 Speed n (rpm)	功率 Power P (kW)		电机型号 Motor supplied (kW)	泵效率 Eff. η (%)	必需汽 蚀余量 (NPSH) r (m)	叶轮直径 Impeller diameter (mm)	泵口径 Pump nozzle (mm)		锥管直径 Tape pipe diameter (mm)		重量 Weight (kg)
	m³/h	L/s			轴 Shaft	电机 Motor					In	Out	In	Out	
XA40/20	18 30 36	5 8.33 10	63 58 53	2900	6.3 8.17 8.96	7.5 11 11	Y160M1-2 11kW	49 58 58	1.8 2 2.7	Φ214	65	40		65	44
XA40/20A	17 29 34.5	4.72 8.06 9.58	57.4 52.4 48	2900	5.72 7.46 8.05	7.5 11 11	Y160M1-2 11kW	46.4 55.5 56	1.8 1.95 2.45	Φ205	65	40		65	44
XA40/20B	16.5 27.5 33	4.58 7.64 9.17	51.8 47.5 43.3	2900	5.28 6.71 7.24	5.5 7.5 11	Y160M1-2 11kW	44 53 53.8	1.8 1.9 2.2	Φ195	65	40		65	44
XA40/26	20 33 40	5.56 9.17 11.11	97 92 87	2900	13.22 16.22 17.88	15 18.5 22	Y160M1-2 22kW	40 51 53	1.8 2.0 2.5	Φ264	65	40		65	61
XA40/26A	19.5 32 38.5	5.42 8.89 10.7	89 84 79.5	2900	12.28 15.00 16.35	15 18.5 18.5	Y160L-2 18.5kW	38.5 48.5 51	1.8 1.95 2.35	Φ255	65	40		65	61
XA40/26B	18.5 30.5 37	5.14 8.47 10.28	82 78 73	2900	11.17 13.78 15.02	15 18.5 18.5	Y160L-2 18.5kW	37 47 49	1.8 1.9 2.2	Φ245	65	40		65	61
XA50/13	36 60 72	10 16.67 20	25.5 23 20.5	2900	3.85 4.95 5.36	5.5 5.5 7.5	Y132S2-2 7.5kW	65 76 75	2.5 3.2 4	Φ139	65	50	80	80	34
XA50/13A	33.5 56 67.5	9.31 15.56 18.75	22 19.5 17.2	2900	3.19 4.02 4.33	5 5.5 5.5	Y132S1-2 5.5kW	63 74 73	2.5 3.1 3.6	Φ130	65	50	80	80	34
XA50/13B	31 52 62	8.61 14.44 17.22	18.5 16.5 14.8	2900	2.56 3.24 3.52	3 4 5.5	Y132S1-2 5.5kW	61 72 71	2.5 2.9 3.3	Φ120	65	50	80	80	34
XA50/16	40 65 78	11.11 18.05 21.67	41.5 38 35	2900	7.06 9.09 10.05	11 11 11	Y160M1-2 11kW	64 74 74	2.5 3.5 4.2	Φ174	65	50	80	80	38
XA50/16A	38 61.5 74	10.56 17.1 20.6	37 33.8 31.2	2900	6.19 7.9 8.75	7.5 11 11	Y160M1-2 11kW	62 72 72	2.5 3.3 3.9	Φ165	65	50	80	80	38
XA50/16B	35.5 58 69.5	9.86 16.11 19.31	32.5 29.5 27	2900	5.24 6.66 7.36	5.5 11 11	Y160M1-2 11kW	60 70 69.5	2.35 3.1 3.7	Φ155	65	50	80	80	38
XA50/20	36 60 72	10 16.67 20	62 56 50	2900	10.48 13.07 14.42	15 15 18.5	Y160L-2 18.5kW	58 70 68	2.5 3.2 4	Φ214	65	50	80	80	46
XA50/20A	34.5 57.5 69	9.6 16 19.2	56 50.5 45	2900	9.25 11.5 12.64	11 15 15	Y160M2-2 15kW	57 69 67	2.5 3.1 3.75	Φ205	65	50	80	80	46
XA50/20B	33 54.5 65.5	9.1 15.1 18.3	50.6 45.6 40.5	2900	8.13 10 11	11 15 15	Y160M2-2 15kW	55.5 67.5 66	2.5 3 3.5	Φ195	65	50	80	80	46
XA50/26G	40 65 78	11.11 18.05 21.67	100 91 82	2900	20.17 25.97 29.03	30 30 37	Y200L2-2 37kW	54 62 66	2.5 3.5 4.2	Φ264	65	50	80	80	63
XA50/26GA	38.5 63 75.5	10.69 17.5 20.97	92.5 84 75.6	2900	18.29 23.63 26.34	22 30 30	Y200L1-2 30kW	53 61 59	2.4 3.3 3.9	Φ255	65	50	80	80	63
XA50/26GB	37 60.5 72.5	10.28 16.81 20.14	85.5 77.5 69.8	2900	16.57 21.29 23.76	18.5 30 30	Y200L1-2 30kW	52 60 58	2.3 3.2 3.9	Φ245	65	50	80	80	63
XA65/13	60 100 120	16.67 27.78 33.33	25 22 19	2900	6.1 7.68 8.38	7.5 11 11	Y160M1-2 11kW	67 78 74	3 3.5 4.5	Φ139	80	65	100	100	39
XA65/13A	56 93.5 112.5	15.56 26 30.25	21.1 16 12.5	2900	5.03 5.83 6.49	7.5 11 11	Y160M1-2 11kW	64 70 59	3 3.5 4.1	Φ130	80	65	100	100	39
XA65/13B	52 86.5 104	14.44 24 28.9	18 13.7 10.6	2900	4.12 4.88 5.43	5.5 7.5 7.5	Y132S2-2 7.5kW	62.5 66 57	3 3.3 3.75	Φ120	80	65	100	100	39
XA65/16	60 100 120	16.67 27.78 33.33	39 35 32	2900	10.28 12.7 13.94	15 15 18.5	Y160L-2 18.5kW	62 75 75	3.6 4.2 5.2	Φ174	80	65	100	100	43
XA65/16A	57 95 114	15.83 26.4 31.7	34.5 31 28	2900	8.92 11 11.92	11 15 15	Y160M2-2 15kW	60 73 73	3.6 4.1 4.8	Φ165	80	65	100	100	43
XA65/16B	53.5 89 107	14.86 24.72 29.72	30 27 24.5	2900	7.54 9.22 10	11 11 11	Y160M1-2 11kW	58 71 71	3.6 3.95 4.5	Φ155	80	65	100	100	43
XA65/20G	66 110 132	18.33 30.55 36.67	63 57 52	2900	17.97 23.07 25.09	22 30 30	Y200L1-2 30kW	63 74 74.5	3 3.9 5.3	Φ214	80	65	125	100	70
XA65/20GA	63 105.5 126.5	17.5 29.31 35.14	57 51 47	2900	15.77 20.09 22.03	18.5 30 30	Y200L1-2 30kW	62 73 73.5	3 3.75 4.85	Φ204	80	65	125	100	70

性能表 PERFORMANCE TABLE n=2900rpm

型号 Model	流量 Capacity Q		扬程 Head H (m)	转速 Speed n (rpm)	功率 Power P (kW)		电机型号 Motor supplied (kW)	泵效率 Eff. η (%)	必需汽 蚀余量 (NPSH) _r (m)	叶轮直径 Impeller diameter (mm)	泵口径 Pump nozzle (mm)		锥管直径 Tape pipe diameter (mm)		重量 Weight (kg)
	m ³ /h	L/s			轴 Shaft	电机 Motor					In	Out	In	Out	
XA65/20GB	60 100 120	16.7 27.78 33.33	51.5 46.5 42.5	2900	13.8 17.59 19.16	18.5 22 30	Y200L-2 30kW	61 72 72.5	3 3.6 4.4	Φ195	80	65	125	100	70
XA65/26	72 120 144	20 33.33 40	97 89 83	2900	29.5 29.84 44.59	37 45 55	Y250M-2 55kW	64.5 73 73	3.3 4.5 5.4	Φ264	80	65	125	100	81
XA65/26A	69.5 116 139	19.31 32.22 38.61	90 82.5 77	2900	26.21 36.19 40.48	37 45 45	Y225M-2 45kW	65 72 72	3.25 4.4 4.95	Φ255	80	65	125	100	81
XA65/26B	67 111.5 133.5	18.61 31 37.1	83 76 71	2900	23.66 32.53 36.61	30 37 45	Y225M-2 45kW	64 71 70.5	3.2 4.25 4.95	Φ245	60	65	125	100	81
XA80/16G	100 162 195	27.78 45 54.17	39 35 31.5	2900	15.85 19.3 21.18	18.5 22 30	Y200L1-2 30kW	67 80 79	3.3 4 5	Φ174	100	80	150	125	54
XA80/16GA	95 153.5 185	26.39 42.64 51.39	34.5 31 28	2900	13.73 16.61 18.32	18.5 22 22	Y180M-2 22kW	65 78 77	3.3 3.85 4.6	Φ165	100	80	150	125	54
XA80/16GB	89 144.5 174	24.72 40.14 48.33	30.5 27.2 24.5	2900	11.73 14.05 15.46	15 15 18.5	Y160L-2 18.5kW	63 76 75	3.25 3.7 4.3	Φ155	100	80	150	125	54
XA80/20	115 190 225	31.94 52.78 62.5	61 55 50	2900	27.29 35.57 38.76	37 37 45	Y225M-2 45kW	70 80 79	4 5.1 6.2	Φ214	100	80	150	125	70
XA80/20A	110 182 215.5	30.56 50.56 59.86	55.5 50 45.5	2900	24.1 31.37 34.23	30 37 37	Y200L2-2 37kW	69 79 78	4 4.9 5.85	Φ205	100	80	150	125	70
XA80/20B	105 173 205	29.17 48.06 56.94	50 45 41	2900	21.03 24.08 29.72	30 30 37	Y200L2-2 37kW	68 78 77	4 4.7 5.5	Φ195	100	80	150	125	70
XA80/26	115 190 225	31.94 52.78 62.5	96 86 79	2900	45.5 57.8 64.5	55 75 75	Y280S-2 75kW	66 77 75	4 5.4 6.5	Φ195	100	80	150	125	91
XA80/26A	111 183.5 217.5	30.83 50.97 60.42	89 79.8 73	2900	41.39 52.47 58.43	55 75 75	Y280S-2 75kW	65 76 74	3.95 5.2 6.25	Φ255	100	80	150	125	91
XA80/26B	106.5 176.5 209	29.58 49.03 58.06	82 73.5 67.5	2900	37.16 47.11 52.63	45 55 75	Y280S-2 75kW	64 75 73	3.9 5 6	Φ245	100	80	150	125	91
XA100/16	151.2 252 302.4	42 70 84	33 27 22.4	2900	22.65 25.74 26.3	30 37 37	Y200L2-2 37kW	60 72 70	5 5 5.5	Φ174	125	100	200	150	71
XA100/20	180 295 340	50 79.17 94.44	59 52 44	2900	41.32 50.14 54.68	55 75 75	Y280S-2 75kW	70 80.5 74.5	4 5.3 6.3	Φ214	125	100	200	150	85
XA100/20A	172.5 273 325.5	47.92 75.83 90.42	52.5 46 38	2900	35.75 43.02 45.83	45 55 55	Y250M-2 55kW	69 79.5 73.5	3.95 4.9 5.95	Φ205	125	100	200	150	85
XA100/20B	164 260 310	45.56 72.22 86.11	47 40 32.5	2900	30.87 36.08 37.85	37 45 45	Y225M-2 45kW	68 78.5 72.5	3.9 4.8 5.6	Φ195	125	100	200	150	85
XA100/26G	190 295 350	52.78 81.94 97.22	97 85 75	2900	71.7 87.54 97.93	90 100 100	Y315S-2 110kW	70 80 73	3.8 5.2 6.5	Φ264	125	100	200	150	115
XA100/26GA	183.5 285 338	50.97 79.17 93.89	89 78 68.5	2900	64.45 78.63 87.57	75 90 100	Y315S-2 110kW	69 77 72	3.75 5 6.2	Φ255	125	100	200	150	115
XA100/26GB	177 274 325	49.17 76.11 90.28	82 71.5 63	2900	59.13 70.2 78.54	75 90 90	Y280M-2 90kW	68 76 71	3.7 4.8 5.9	Φ245	125	100	200	150	115
XA125/20	237.6 360 475	66 100 132	54.5 49 40	2900	59.3 66.3 70.9	75 90 90	Y280M-2 90kW	59.5 72.5 73	7 7.2 7	Φ214	150	125	250	200	106
XA125/20A	228 345 455	63.2 95.8 126	49.5 44 35.3	2900	53 58 61	75 75 75	Y280S-2 75kW	58.5 71.5 72	7 7.1 6.85	Φ205	150	125	250	200	106

性能表 PERFORMANCE TABLE n=1450rpm

型号 Model	流量 Capacity Q		扬程 Head H (m)	转速 Speed n (rpm)	功率 Power P (kW)		电机型号 Motor supplied (kW)	泵效率 Eff. η (%)	必需汽 蚀余量 (NPSH) _r (m)	叶轮直径 Impeller diameter (mm)	泵口径 Pump nozzle (mm)		锥管直径 Tape pipe diameter (mm)		重量 Weight (kg)
	m³/h	L/s			轴 Shaft	电机 Motor					In	Out	In	Out	
XA32/13	4.5 7.5 9	1.25 2.08 2.5	6 5.5 5	1450	0.156 0.197 0.211	0.55 0.55 0.55	Y801-4 0.55kW	47 57 58	1.8 2.0 2.3	Φ129	50	32			27.5
XA32/16	6 9 11	1.67 2.5 3.05	9.5 9 8.3	1450	0.353 0.416 0.46	0.55 0.55 0.55	Y801-4 0.55kW	44 53 54	1.8 2 2.4	Φ174	50	32			35
XA32/20	6 9 11	1.67 2.5 3.05	15 25 13.2	1450	0.646 0.763 0.84	0.75 1.1 1.1	Y90S-4 1.1kW	38 45 47	1.8 2 2.3	Φ214	50	32			41
XA32/26	7 11 13	1.94 3.05 3.61	24.2 23 22	1450	1.53 1.81 1.95	2.2 2.2 3	Y100L2-4 3kW	30 38 40	1.8 2 2.4	Φ264	50	32			59
XA40/13	9 15 18	2.5 4.17 5	6.3 5.5 5.3	1450	0.297 0.365 0.406	0.55 0.55 0.55	Y801-4 0.55kW	52 65 64	1.8 2 2.4	Φ139	65	40			30
XA40/16	9 15 18	2.5 4.17 5	9.7 8.5 7.6	1450	0.495 0.579 0.642	0.55 0.75 1.1	Y90S-4 1.1kW	48 60 58	1.8 2 2.4	Φ175	65	40			36
XA40/20	9 15 18	2.5 4.17 5	15.2 14 12.8	1450	0.79 1.04 1.16	1.1 1.5 1.5	Y90L-4 1.5kW	47 55 54	1.8 2 2.4	Φ214	65	40			44
XA40/26	10 16 20	2.78 4.44 5.56	24 23 21.8	1450	1.77 2.18 2.38	2.2 2.2 3	Y100L2-4 3kW	37 46 50	1.8 2 2.4	Φ264	65	40		65	61
XA40/32	11 18 21.5	3 5 6	38 35 32	1450	3.5 4.24 4.83	5.5 5.5 5.5	Y132S-4 5.5kW	32 40.5 39	3.1 2.1 3.8	Φ329	65	40		65	95.8
XA40/32A	10.5 17 20.5	2.92 4.72 5.7	34.5 32 29	1450	3.24 3.85 4.32	4 5.5 5.5	Y132S-4 5.5kW	30.5 38.5 37.5	3.3 2 2.9	Φ315	65	40		65	95.8
XA40/32B	10 16.5 20	2.78 4.58 5.56	31 29 26	1450	2.91 3.52 3.94	4 5.5 5.5	Y132S-4 5.5kW	29 37 36	3.6 2 2.7	Φ300	65	40		65	95.8
XA50/13	18 30 36	5 8.33 10	6.4 5.8 5.2	1450	0.514 0.658 0.739	0.75 0.75 1.1	Y90S-4 1.1kW	61 72 69	2.2 2.4 2.8	Φ139	65	50	80	65	34
XA50/16	20 32 38	5.55 8.88 10.55	10.3 9.5 8.8	1450	0.93 1.18 1.3	1.1 1.5 1.5	Y90L-4 1.5kW	60 70 70	2.3 2.4 3	Φ174	65	50	80	65	38
XA50/20	18 30 36	5 8.33 10	15.4 13.5 11.6	1450	1.37 1.7 1.86	1.5 2.2 2.2	Y100L1-4 2.2kW	55 65 61	2.2 2.3 2.9	Φ214	65	50	80	65	46
XA50/26	20 32 38	5.55 8.88 10.55	25 22.5 19.8	1450	2.62 3.27 3.63	3 4 5.5	Y132S-4 5.5kW	52 60 56.5	2.3 2.4 3	Φ264	65	50	80	65	63
XA50/32	24 40 48	6.67 11.11 13.33	36 34 32	1450	5 6.38 7.09	5.5 7.5 11	Y160M-4 11kW	47 58 59	2 2.5 3.2	Φ328	65	50	80	65	101
XA50/32A	23 38.5 46	6.39 10.69 12.78	32.5 30.6 28.7	1450	4.52 5.73 6.36	5.5 7.5 7.5	Y132M-4 7.5kW	45 56 56.5	2 2.4 3	Φ315	65	50	80	65	101
XA50/32B	22 36.5 44	6.11 10.14 12.22	29.4 27.7 26	1450	4.24 5.1 5.66	5.5 7.5 7.5	Y132M-4 7.5kW	41.5 54 55	2 2.3 2.8	Φ300	65	50	80	65	101
XA65/13	30 50 60	8.33 13.89 16.67	6.2 5.4 4.7	1450	0.79 0.98 1.05	1.1 1.1 1.5	Y90L-4 1.5kW	64 75 73	2.2 2.4 2.8	Φ139	80	65	100	80	39
XA65/16	30 50 60	8.33 13.89 16.66	9.8 8.8 7.9	1450	1.33 1.62 1.75	2.2 2.2 2.2	Y100L1-4 2.2kW	60 74 73.5	2 2.2 2.5	Φ174	80	65	100	80	43
XA65/20	35 55 66	9.72 15.27 15.33	15.3 14 13.1	1450	2.31 2.87 3.2	3 4 4	Y112M-4 4kW	63 73 73.5	1.9 2 2.3	Φ214	80	65	125	80	52
XA65/26	36 60 72	10 16.67 20	24.5 22.5 20.6	1450	4 5.25 5.77	5.5 7.5 7.5	Y132M-4 7.5kW	60 70 70	2 2.3 3	Φ264	80	65	125	80	81
XA65/32	40 65 78	11.11 18.06 21.67	37 34 31	1450	7.46 9.56 10.62	11 11 15	Y160L-4 15kW	54 63 62	1.9 2 2.5	Φ329	80	65	125	80	110
XA65/32A	37 62 74.5	10.28 17.2 20.69	33.4 30.9 28	1450	6.73 8.54 9.47	11 11 11	Y160M-4 11kW	50 61 60	1.9 2 2.3	Φ315	80	65	125	80	110
XA65/32B	34 56.5 68	9.44 15.69 18.89	30.5 28 25.8	1450	6 7.3 8.1	7.5 11 11	Y160M-4 11kW	47 59 58	2 2 2.1	Φ300	80	65	125	80	110
XA80/16	50 80 96	13.89 22.22 26.67	9.9 9 8.3	1450	2.2 2.55 2.75	3 3 3	Y100L2-4 3kW	61 77 79	2.1 2.5 3.2	Φ174	100	80	150	100	54

性能表 PERFORMANCE TABLE

n=1450rpm

型号 Model	流量 Capacity Q		扬程 Head H (m)	转速 Speed n (rpm)	功率 Power P (kW)		电机型号 Motor supplied (kW)	泵效率 Eff. η (%)	必需汽 蚀余量 (NPSH) r (m)	叶轮直径 Impeller diameter (mm)	泵口径 Pump nozzle (mm)		锥管直径 Tape pipe diameter (mm)		重量 Weight (kg)
	m³/h	L/s			轴 Shaft	电机 Motor					In	Out	In	Out	
XA80/20	58 95 112	16.11 26.39 31.11	15.5 14 13	1450	3.77 4.64 5.15	5.5 7.5 7.5	Y132M-4 7.5kW	65 78 77	2.1 2.5 3.2	Φ214	100	80	150	100	70
XA80/26	58 95 112	16.11 26.39 31.11	23.5 21.5 20	1450	5.8 7.52 8.36	7.5 11 11	Y160M-4 11kW	64 74 73	2.1 2.5 3.2	Φ264	100	80	150	100	91
XA80/32	60 100 120	16.67 27.78 33.33	36 33 30	1450	9.65 12.68 14	15 15 18.5	Y180M-4 18.5kW	61 71 70	1.9 2 2.6	Φ329	100	80	125	100	120
XA80/32A	57.5 95.5 114.5	15.97 26.53 31.81	32.4 29.7 27	1450	8.75 11.2 12.38	11 15 15	Y160L-4 15kW	58 69 68	1.9 2 2.3	Φ315	100	80	125	100	120
XA80/32B	54.5 91 109	15.14 25.28 30.28	29.3 26.5 24.5	1450	7.77 9.91 11.02	11 15 15	Y160L-2 15kW	56 67 66	1.9 2 2.2	Φ300	100	80	150	125	120
XA80/40	60 100 120	16.67 27.78 33.33	58 53 48	1450	18.96 24.06 26.58	22 30 30	Y200L-4 30kW	50 60 59	2.2 2.5 3.4	Φ409	100	80	125	100	161
XA80/40A	58 96.5 116	16.11 26.51 32.22	53.7 48.9 44.4	1450	17.07 22.16 24.6	22 30 30	Y200L-4 30kW	48 58 57	2.2 2.4 3.2	Φ395	100	80	125	100	161
XA80/40B	58 93 111.5	15.56 25.83 30.97	49.4 45 40.9	1450	16.38 20.35 22.58	22 30 30	Y200L-4 75kW	46 56 55	2.2 2.4 3	Φ380	100	80	125	100	161
XA100/16	75.6 126 151.2	32 35 42	8 6.8 5.7	1450	2.80 3.32 3.45	4 5.5 5.5	Y132S-4 5.5kW	58.9 70.2 68	2.3 2.5 3.3	Φ174	125	100	150	125	71
XA100/20	90 142 170	25 39.44 47.22	15 13 11.5	1450	5.25 6.36 6.91	7.5 7.5 11	Y160M-4 11kW	70 79 77	2.2 2.5 3.4	Φ214	125	100	200	125	85
XA100/26	95 148 175	26.39 41.11 45.61	24.5 22 20	1450	9.19 11.37 12.54	11 15 15	Y160L-4 15kW	69 78 76	2.3 2.6 3.5	Φ264	125	100	200	125	106
XA100/32	81 135 162	22.5 37.5 45	37.5 34 30	1450	12.78 16.7 18.38	15 22 22	Y180L-4 22kW	65 75 72	2 2 2.3	Φ329	125	100	150	125	134
XA100/32A	77.5 130 155	21.53 36.1 43.06	33.5 30.5 27	1450	11.5 15.2 16.64	15 22 22	Y180L-4 22kW	61.5 71 68.5	2 2 2.18	Φ315	125	100	150	125	134
XA100/32B	73.5 123 147.5	20.42 34.17 41	30.5 27.5 24.5	1450	10.44 13.55 14.92	15 18.5 18.5	Y160M-4 18.5kW	58.5 68 66	2 2 2.1	Φ300	125	100	150	125	134
XA100/40	90 150 180	25 41.67 50	57 52 48.5	1450	24.59 31.24 34.96	30 37 45	Y225M-4 45kW	58 68 68	1.7 2 2.7	Φ409	125	100	150	125	174
XA100/40A	87 145 174	24.17 40.28 48.33	52.5 45.2 44.5	1450	22.22 28.84 31.57	30 37 37	Y225S-4 37kW	56 68 66.4	1.7 2 2.5	Φ395	125	100	150	125	174
XA100/40B	84 139.5 167.5	23.33 38.75 46.53	48.5 44.5 41.2	1450	20.54 26.42 29.37	30 37 37	Y225S-4 37kW	54 64 64	1.7 1.9 2.4	Φ380	125	100	150	125	174
XA125/20	115 190 230	32 53 63.6	14.2 12.5 11	1450	7.3 8.55 9.03	11 11 11	Y160M-4 11kW	61 76 76	2.6 3.5 3	Φ214	150	125	200	150	106
XA125/26	144 240 288	40 66.67 80	23.5 21 18.8	1450	13.17 16.95 18.9	18.5 22 22	Y180L-4 22kW	70 81 78	2.3 2.5 3.2	Φ264	150	125	200	150	115
XA125/26A	139 232 278.5	38.61 64.44 77.36	21.3 19.2 17	1450	12.03 15.35 16.96	15 22 22	Y180L-4 22kW	67 79 76	2.3 2.5 3	Φ255	150	125	200	150	115
XA125/26B	134 223 267.5	37.22 61.94 74.31	19.7 17.5 15.7	1450	11.23 13.98 15.46	15 18.5 18.5	Y180M-4 18.5kW	64 76 74	2.3 2.4 2.8	Φ245	150	125	200	150	115
XA125/32	120 200 240	33.3 55.6 66.7	35.1 32 29.5	1450	17.36 22.35 24.72	22 30 30	Y200L-4 30kW	66 78 78	2.1 2 2.7	Φ329	150	125	200	150	163
XA125/32A	115 191 229	31.94 53.06 63.61	31.5 29 26.5	1450	15.78 20.11 22.2	18.5 30 30	Y200L-4 30kW	62.5 75 74.5	2.15 1.95 2.4	Φ315	150	125	200	150	163
XA125/32B	109 182 218.5	30.28 50.56 60.7	28.5 26 24	1450	14.1 17.77 19.7	18.5 22 22	Y180L-4 22kW	60 72.5 72.5	2.2 2 2.2	Φ300	150	125	200	150	163
XA125/40	144 245 300	40 68.05 83.33	58 52 46	1450	34.46 46.65 52.2	45 55 75	Y280S-4 75kW	66 76 72	2.2 2.4 3.2	Φ409	150	125	200	150	181

XA 型单级单吸离心泵 SINGLE STAGE CENTRIFUGAL PUMP

13

性能表PERFORMANCE TABLE

n=1450rpm

型号 Model	流量 Capacity Q		扬程 Head H (m)	转速 Speed n (rpm)	功率 Power P (kW)		电机型号 Motor supplied (kW)	泵效率 Eff. η (%)	必需汽 蚀余量 (NPSH) r (m)	叶轮直径 Impeller diameter (mm)	泵口径 Pump nozzle (mm)		锥管直径 Tape pipe diameter (mm)		重量 Weight (kg)
	m³/h	L/s			轴 Shaft	电机 Motor					In	Out	In	Out	
XA125/40A	139 236.5 289	38.61 65.7 80.42	53.5 48 42.5	1450	31.4 41.78 47.87	37 55 55	Y250M-4 55kW	64.5 74 70	2.2 2.4 3	Φ395	150	125	200	150	181
XA125/40B	133.5 227.5 278.5	37.08 63.2 77.36	49.5 44 39	1450	28.56 37.6 43.18	37 45 55	Y250M-4 55kW	63 72.5 68.5	2.2 2.3 2.8	Φ380	150	125	200	150	181
XA150/20	216 360 424.8	60 100 118	14.4 12.2 10.3	1450	12.10 14.95 15.47	15 18.5 18.5	Y180M-4 18.5kW	70 80 77	3 3.5 4	Φ220	200	150	250	200	156
XA150/26	194 324 414	54 90 115	23 21 16.8	1450	17.14 22.87 25.59	22 30 30	Y200L-4 30kW	71 81 74	2.7 3 3.3	Φ264	200	150	250	200	148
XA150/32	230 370 445	63.89 102.18 123.61	36 33 30	1450	30.89 40.55 44.88	37 45 55	Y250M-4 55kW	73 82 81	2.8 3.2 3.6	Φ329	200	150	250	200	170
XA150/32A	220 354 426	61.11 98.33 118.33	32.5 30 27	1450	27.62 36.38 39.9	37 45 45	Y225M-4 45kW	70.5 79.5 68	2.8 3.1 3.5	Φ315	200	150	250	200	170
XA150/32B	209.5 337.5 405.5	55.2 93.75 112.64	29.5 27 24.5	1450	24.4 31.8 35.14	30 37 37	Y225S-4 37kW	69 78 77	2.8 3 3.3	Φ300	200	150	250	200	170
XA150/40	240 385 460	66.67 106.94 127.78	54 50 46	1450	51.15 66.36 73.88	75 75 90	Y280M-4 90kW	69 79 78	2.8 3.2 3.6	Φ409	200	150	250	200	209
XA150/40A	232 372 444	64.44 103.33 123.33	50 46 42.5	1450	46.8 60.5 67.62	55 75 75	Y280S-4 75kW	67.5 77 76	2.8 3.2 3.6	Φ395	200	150	250	200	209
XA150/40B	223 357.5 427.5	61.94 99.3 118.75	46 42 39	1450	42.32 54.2 61	55 75 75	Y280S-4 75kW	66 75.5 74.5	2.8 3.1 3.5	Φ380	200	150	250	200	209
XA150/50	250 400 468	69.4 111.1 130	88 80 72	1450	83.2 111.7 125.7	110 132 132	Y315M-4 132kW	72 78 73	3 4 4.5	Φ500	200	150	250	200	1285
XA200/30	486 630 720	135 175 200	30 26 22	1450	50.9 51.8 53.25	55 55 55	Y250M-4 55kW	78 85 81	5.5 6.7 7.2	Φ320	250	200	300	250	1017
XA200/40	486 630 720	135 175 200	50 45 38	1450	82.7 91.9 95.5	110 110 110	Y315S-4 110kW	80 85 78	5 6.3 6.8	Φ396	250	200	300	250	1238
XA200/50	486 630 720	135 175 200	81 76 65	1450	142.9 157.1 163.4	160 200 200	Y315L2-4 200kW	75 83 78	5 6.3 6.8	Φ485	250	200	300	250	1712
XA250/32	600 800 915	166.7 222.2 254.2	36 32 28	1450	72.6 82 85.1	90 90 90	Y280M-4 90kW	81 85 82	4.8	Φ345	300	250	350	300	1320
XA250/40	560 800 915	155.6 222.2 254.2	54 50 46	1450	102.9 132.8 145.1	132 160 160	Y315L1-4 160kW	80 82 79	4.8	Φ417	300	250	350	300	1650
XA250/50	600 900 1170	166.7 250 325	78 70 62	1450	174.6 204.2 239.4	200 220 250	Y355M-4 250kW	73 84 82.5	2.5 3.2 4.2	Φ500	300	250	350	300	1880
XA300/40	819 1260 1470	227.5 350 408.3	50 44 37	1450	152.8 177.6 183.6	200 220 220	Y355M1-4 220kW	72 85 81	3.6 4.6 4.9	Φ355	350	300	400	350	1918

型号中加G是表示经改进，泵轴直径及外形安装尺寸与原型不同。

The type designation with the block letter "G" means the improved type, which diameter of the pump shaft and the overall dimensions are different to original

法兰连接尺寸 FLANGE CONNECTING DIMENSIONS(见图2 see fig.2)

ΦK ₁ 、ΦK ₂	100	110	125	145	160	180	210	240	295
n - d ₁	4 - Φ18	4 - Φ18	4 - Φ18	4 - Φ18	8 - Φ18	8 - Φ18	8 - Φ18	8 - Φ22	8 - Φ22
Φ1、Φ2	32	40	50	65	80	100	125	150	200
D ₁ 、D ₂	140	150	165	185	200	220	250	285	340

法兰孔及其他尺寸符合国际标准 ISO2084PN16

The dimension of flange is up to the international standard ISO2084PN16.

泵外形尺寸

OVERALL DIMENSIONS

(见图2 see fig.2)

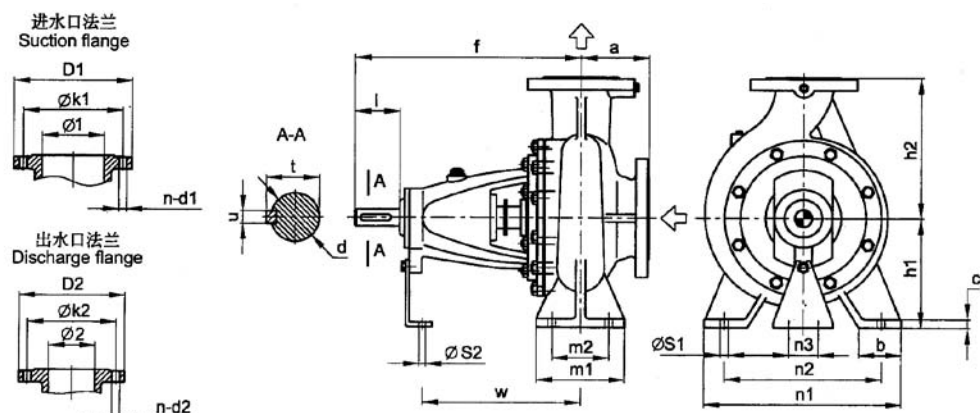



图2 fig.2

型号 Model	轴径 Dia.of shaft	泵尺寸 Dimension of pump						泵脚尺寸 Dimension of foot of pump										轴端 End of shaft				
		Φ1	Φ2	a	f	h ₁	h ₂	b	c	m ₁	m ₂	n ₁	n ₂	ΦS ₁	n ₃	ΦS ₂	w	d	l	t	u	
XA32/13	25	50	32	80	360	112	140	50	14	100	70	190	140	14.5	100	14	267	24	50	27	8	
XA32/16	25	50	32	80	360	132	160	50	14	100	70	240	190	14.5	100	14	267	24	50	27	8	
XA32/20	25	50	32	80	360	160	180	50	14	100	70	240	190	14.5	110	14	267	24	50	27	8	
XA32/26	25	50	32	100	360	180	225	65	14	125	95	320	250	14.5	110	14	267	24	50	27	8	
XA40/13	25	65	40	80	360	112	140	50	14	100	70	210	160	14	100	14	267	24	50	27	8	
XA40/16	25	65	40	80	360	132	160	50	14	100	70	240	190	14.5	110	14	267	24	50	27	8	
XA40/20	25	65	40	100	360	160	180	50	14	100	70	265	212	14.5	110	14	267	24	50	27	8	
XA40/26	25	65	40	100	360	180	225	65	14	125	95	320	250	14.5	110	14	267	24	50	27	8	
XA40/32	35	65	40	125	470	200	250	65	16	125	95	345	280	14	110	14	344	32	80	35	10	
XA50/13	25	65	50	100	360	132	160	50	14	100	70	240	190	14	100	14	267	24	50	27	8	
XA50/16	25	65	50	100	360	160	180	50	14	100	70	265	212	14.5	110	14	267	24	50	27	8	
XA50/20	25	65	50	100	360	160	200	50	14	100	70	265	212	14.5	110	14	267	24	50	27	8	
XA50/26	25	65	50	100	360	180	225	65	14	125	95	320	250	14.5	110	14	267	24	50	27	8	
XA50/26G	35A	65	50	100	470	180	225	65	14	125	95	320	250	14	110	14	342	32	80	35	10	
XA50/32	35	65	50	125	470	225	280	65	18	125	95	345	280	14	110	14	348	32	80	35	10	
XA65/13	25	80	65	100	360	160	180	65	15	125	95	280	212	14	110	14	267	24	50	27	8	
XA65/16	25	80	65	100	365	160	200	65	14	125	95	280	212	14.5	110	14	267	24	50	27	8	
XA65/20	25	80	65	100	360	180	225	65	14	125	95	320	250	14	110	14	267	24	50	27	8	
XA65/20G	35A	80	65	100	470	180	225	65	14	125	95	320	250	14	110	14	334	32	80	35	10	
XA65/26	35	80	65	100	470	200	250	80	15	160	120	360	280	17.5	110	14	342	32	80	35	10	
XA65/32	35	80	65	125	470	225	280	80	18	160	120	400	315	18	110	14	342	32	80	35	10	
XA80/16	25	100	80	125	360	180	225	65	14	125	90	320	250	14.5	110	14	267	24	50	27	8	
XA80/16G	35A	100	80	125	460	180	225	65	14	125	90	320	250	14.5	110	14	329.5	32	80	35	10	
XA80/20	35	100	80	125	470	180	250	65	15	125	95	345	280	18	110	14	342	32	80	35	10	
XA80/26	35	100	80	130	470	200	280	80	15	160	120	400	315	18	110	14	342	32	80	35	10	
XA80/32	35	100	80	125	470	250	315	83	16	160	120	400	315	18	110	14	342	32	80	35	10	
XA80/40	45	100	80	125	530	280	355	85	18	160	120	440	340	17.5	110	14	370	42	110	45	12	
XA100/16	35	125	100	125	470	200	250	80	15	164	120	360	280	18	110	14	352	32	80	35	10	
XA100/20	35	125	100	125	470	200	280	80	16	160	120	360	280	17.5	110	14	342	32	80	35	10	
XA100/26	35	125	100	140	470	200	280	80	16	160	120	400	315	18	110	14	342	32	80	35	10	
XA100/26G	45A	125	100	140	520	225	280	80	16	160	120	400	315	18	110	14	368	42	110	45	12	
XA100/32	35	125	100	140	470	250	315	80	16	160	120	400	315	17.5	110	14	342	32	80	35	10	
XA100/40	45	125	100	140	530	280	355	100	18	200	150	500	400	23	110	14	370	42	110	45	12	
XA125/20	35	150	125	140	470	250	315	80	16	160	120	400	315	17.5	110	14	342	32	80	35	10	
XA125/26	35	150	125	140	470	250	355	80	16	160	120	400	315	17.5	110	14	342	32	80	35	10	
XA125/32	45	150	125	140	530	280	355	100	18	200	150	500	400	23	110	14	370	42	110	45	12	
XA125/40	45	150	125	140	530	315	400	100	18	200	150	500	400	23	110	14	370	42	110	45	12	
XA150/20	35G	200	150	160	495	280	400	100	18	200	150	550	450	23	110	14	367	32	80	35	10	
XA150/26	45	200	150	160	530	250	355	100	18	200	150	450	350	23	110	14	370	42	110	45	12	
XA150/32	45	200	150	160	530	280	400	100	18	200	150	550	450	23	110	14	370	42	110	45	12	
XA150/40	45	200	150	160	530	315	450	100	18	200	150	550	450	23	110	14	370	42	110	45	12	
XA150/50	50	200	150	160	752	400	490	130	30	225	200	605	500	23	180	23	565	55	100	56	16	
XA200/30	50	250	200	225	670	315	435	100	30	200	150	550	450	24	140	19	505	48	110	52	14	
XA200/40	50	250	200	255	670	315	460	100	26	200	150	550	450	24	140	19	505	48	110	52	14	
XA200/50	60	250	200	255	794	400	550	130	30	250	200	605	500	23	180	23	599	60	110	64	18	
XA250/32	50	300	250	250	693	400	500	100	30	270	180	500	400	28	180	22	503	48	110	52	14	
XA250/40	60	300	250	250	803	450	505	125	30	270	210	600	500	23	180	23	608	60	110	64	18	
XA250/50	70	300	250	250	804	450	650	130	30	270	200	760	690	28	200	23	583	80	140	85	20	
XA300/40	60	350	300	300	805	500	600	140	30	340	280	660	560	25	200	25	613	60	110	64	18	

注意：性能表中的泵型号带有A.B.C.D.E字母的，其外形及安装尺寸均与相应无带字母的型号相同，例如：XA50/20A则与XA50/20相同。

Note: With reference to the performance table, the units containing the letters of A B C D E in their type designations have the same overall dimensions as those having no such letters. For instance, the overall dimension of XA50/20A is same of those of XA50/20.

泵安装尺寸 TABLE OF INSTALLATION DIMENSIONS OF PUMP(见图3 see fig.3)

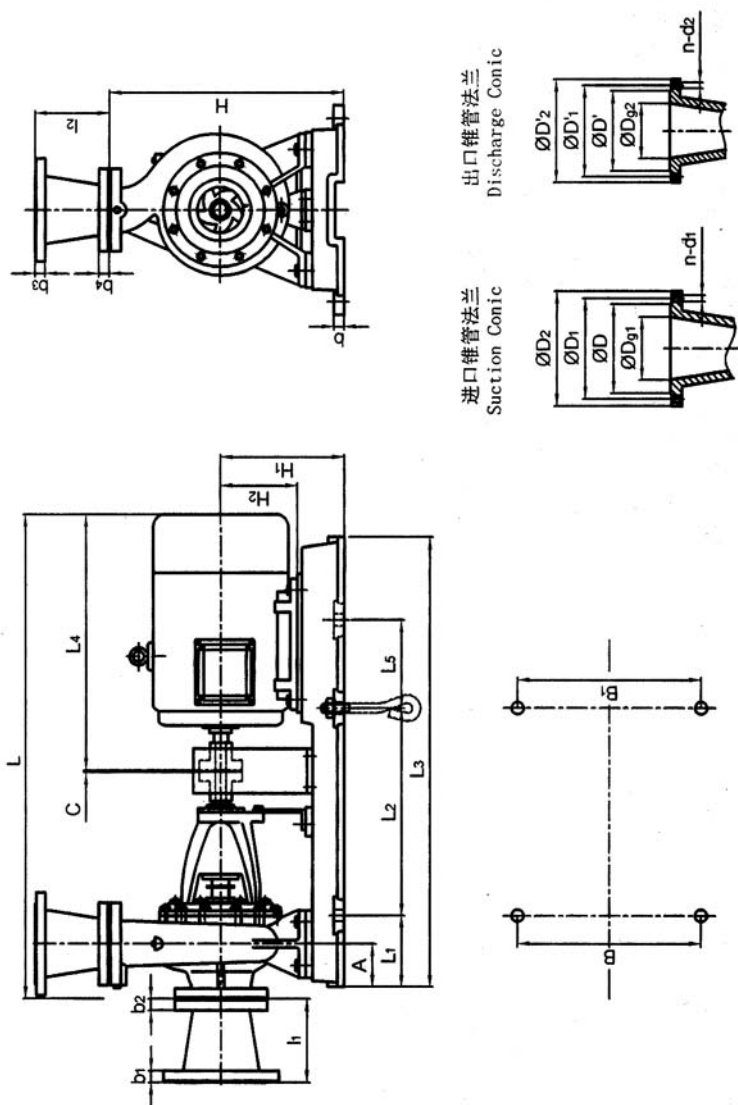泵安装尺寸 TABLE OF INSTALLATION DIMENSIONS OF PUMP(见图3 see fig.3)
n=2900rpm 本表只适用于配铸铁底座 This table is only subject to cast iron bedplate

型号 Model	泵安装尺寸 Dimension of installation of pump set														吸入锥管 Suction conic						吐出锥管 Discharge conic						电机 Motor		总重 (kg) Weight of pump set						
	A	L	L ₁	L ₂	L ₃	L ₄	L ₅	B	B ₁	H	H ₁	H ₂	b	b ₁	b ₂	b ₃	b ₄	C	Φd	I ₁	ΦDg ₁	ΦD	ΦD ₁	ΦD ₂	n-Φd ₁	I ₂	ΦDg ₂	ΦD		ΦD ₁	ΦD ₂	n-Φd ₂	型号 Model	功率 kW	
XA32/13	80	803	170	490	790	355		350	350	327	187	90	25			20	18	2	18.5								100	50	100	125	165	4-17.5	Y90L-2	2.2	74
XA32/13A	80	803	170	490	790	355		350	350	327	187	90	25			20	18	2	18.5								100	50	100	125	165	4-17.5	Y90L-2	2.2	74
XA32/13B	80	778	170	490	790	330		350	350	327	187	90	25			20	18	2	18.5								100	50	100	125	165	4-17.5	Y90S-2	1.5	70
XA32/16	88.5	929	150	520	845	480		350	350	362	202	132	25			20	18	2	20								100	50	100	125	165	4-17.5	Y132S1-2	5.5	129
XA32/16A	98	859	170	490	790	410		350	350	367	207	112	25			20	18	2	18.5								100	50	100	125	165	4-17.5	Y112M-2	4	106
XA32/16B	98	859	170	490	790	410		350	350	327	207	112	25			20	18	2	18.5								100	50	100	125	165	4-17.5	Y112M-2	4	106
XA32/20	110	1073	184	640	1008	628		420	420	415	235	160	30			20	18	2	19								100	50	100	125	165	4-17.5	Y160M1-2	11	201
XA32/20A	88.5	925	150	520	845	480		350	350	410	230	132	25			20	18	2	20								100	50	100	125	165	4-17.5	Y132S2-2	7.5	156
XA32/20B	88.5	925	150	520	845	480		350	350	410	230	132	25			20	18	2	20								100	50	100	125	165	4-17.5	Y132S2-2	7.5	156
XA32/26	110	1151	184	640	1008	683		420	420	515	290	160	30			20	18	2	19								100	50	100	125	165	4-17.5	Y160L-2	18.5	254
XA32/26A	110	1096	184	640	1008	628		420	420	515	290	160	30			20	18	2	19								100	50	100	125	165	4-17.5	Y160M2-2	15	233
XA32/26B	110	1096	184	640	1008	628		420	420	515	290	160	30			20	18	2	19								100	50	100	125	165	4-17.5	Y160M2-2	15	233
XA40/13	98	858	170	490	790	410		350	350	327	187	112	25			22	18	2	19								120	65	125	145	185	4-17.5	Y112M-2	4	100
XA40/13A	98	858	170	490	790	410		350	350	327	187	112	25			22	18	2	19								120	65	125	145	185	4-17.5	Y112M-2	4	100

泵安装尺寸 TABLE OF INSTALLION DIMENSIONS OF PUMP(见图3 see fig.3)
n=2900rpm 本表只适用于配铸铁底座 This table is only subject to cast iron bedplate

型号 Model	泵安装尺寸 Dimension of installation of pump set																				吸入锥管 Suction conic					吐出锥管 Discharge conic					电机 Motor		总重 (kg) Weight of pump set		
	A	L	L ₁	L ₂	L ₃	L ₄	L ₅	B	B ₁	H	H ₁	H ₂	b	b ₁	b ₂	b ₃	b ₄	C	Φd	l ₁	ΦD _{g1}	ΦD	ΦD ₁	ΦD ₂	n-Φd ₁	l ₂	ΦD _{g2}	ΦD	ΦD ₁	ΦD ₂	n-Φd ₂	型号 Model		功率 kW	
XA40/13B	98	843	170	490	790	395		350	350	327	187	100	25				22	18	2	19							120	65	125	145	185	4-17.5	Y100L-2	3	89
XA40/16	78.5	930	150	520	845	480		350	350	362	202	132	25				22	18	2	20							120	65	125	145	185	4-17.5	Y132S2-2	7.5	135
XA40/16A	78.5	930	150	520	845	480		350	350	362	202	132	25				22	18	2	20							120	65	125	145	185	4-17.5	Y132S2-2	5.5	130
XA40/16B	80	860	170	490	790	410		350	350	367	207	112	25				22	18	2	18.5							120	65	125	145	185	4-17.5	Y112M-2	4	109
XA40/20	110	1096	184	640	1008	628		420	420	450	270	160	30				22	18	2	19							120	65	125	145	185	4-17.5	Y160M1-2	11	210
XA40/20A	110	1096	184	640	1008	628		420	420	450	270	160	30				22	18	2	19							120	65	125	145	185	4-17.5	Y160M1-2	11	210
XA40/20B	110	1096	184	640	1008	628		420	420	450	270	160	30				22	18	2	19							120	65	125	145	185	4-17.5	Y160M1-2	11	210
XA40/26	110	1184	184	640	1008	715		420	420	515	290	180	30				22	18	2	19							120	65	125	145	185	4-17.5	Y160M1-2	22	306
XA40/26A	110	1152	184	640	1008	683		420	420	515	290	160	30				22	18	2	19							120	65	125	145	185	4-17.5	Y160L-2	18.5	256
XA40/26B	110	1152	184	640	1008	683		420	420	515	290	160	30				22	18	2	19							120	65	125	145	185	4-17.5	Y160L-2	18.5	256
XA50/13	78.5	949	150	520	845	480		350	350	362	202	132	25				22	20	2	20	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y132S2-2	7.5	133
XA50/13A	78.5	949	150	520	845	480		350	350	362	202	132	25				22	20	2	20	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y132S1-2	5.5	128
XA50/13B	78.5	949	150	520	845	480		350	350	362	202	132	25				22	20	2	20	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y132S1-2	5.5	122
XA50/16	110	1096	184	640	1008	628		420	420	450	270	160	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y160M1-2	11	204
XA50/16A	110	1096	184	640	1008	628		420	420	450	270	160	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y160M1-2	11	204
XA50/16B	110	1096	184	640	1008	628		420	420	450	270	160	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y160M1-2	11	204
XA50/20	110	1152	184	640	1008	683		420	420	470	270	160	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y160L-2	18.5	241
XA50/20A	110	1097	184	640	1008	628		420	420	470	270	160	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y160M2-2	15	200
XA50/20B	110	1097	184	640	1008	628		420	420	470	270	160	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y160M2-2	15	200
XA50/26G	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	37	568
XA50/26GA	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	37	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26G8	93	1363	210	740	1202	785		410	490	515	290	200	30				22	20	2	19	120	80	133	160	200	8-17.5	150	80	133	160	200	8-17.5	Y200L1-2	30	561
XA50/26GB	93	1363	210	740	1																														

泵安装尺寸 TABLE OF INSTALLTION DIMENSIONS OF PUMP(见图3 see fig.3)
n=2900rpm 本表只适用于配铸铁底座 This table is only subject to cast iron bedplate

型号 Model	泵安装尺寸 Dimension of installation of pump set																吸入锥管 Suction conic						吐出锥管 Discharge conic						电机 Motor		总重 (kg) Weight of pump set			
	A	L	L ₁	L ₂	L ₃	L ₄	L ₅	B	B ₁	H	H ₁	H ₂	b	b ₁	b ₂	b ₃	b ₄	C	φd	I ₁	φD _{g1}	φD	φD ₁	φD ₂	n-φd ₁	I ₂	φD _{g2}	φD	φD ₁	φD ₂		n-φd ₂	型号 Model	功率 kW
XA100/20G	116	1586	285	850	1420	985		515	650	670	390	280	30	30	23	28	24	2	24	330	200	268	295	340	8-22	220	150	212	240	285	8-22	Y280S-2	75	755
XA100/20A	110	1533	290	870	1420	930		600	600	630	350	250	40	30	26	28	24	2	28	330	200	268	295	340	8-22	220	150	212	240	285	8-22	Y250M-2	55	607
XA100/20B	128	1438	232.5	800	1265	835		445	530	620	340	225	30	30	26	28	24	2	19	330	200	268	295	340	8-22	220	150	212	240	285	8-22	Y225M-2	45	504
XA100/26G	110	1860	320	1070	1700	1190		740	740	705	425	315	40	30	26	26	24	2	28	330	200	268	295	340	8-22	220	150	212	240	285	8-22	Y315S-2	110	1611
XA100/26GA	110	1860	320	1070	1700	1190		740	740	705	425	280	40	30	26	26	24	3	28	330	200	268	295	340	8-22	220	150	212	240	285	8-22	Y315S-2	110	861
XA100/26GB	110	1705	320	1070	1700	1035		740	740	705	425	280	40	30	26	26	24	3	28	330	200	268	295	340	8-22	220	150	212	240	285	8-22	Y280M-2	90	861
XA125/20G	110	1651	320	1070	1540	1035		670	670	715	400	280	40	30	26	30	28	3	28	350	200	268	295	340	12-22	350	200	268	295	340	12-22	Y280M-2	90	880

泵安装尺寸 TABLE OF INSTALLTION DIMENSIONS OF PUMP(见图3 see fig.3)
n=1450rpm 本表只适用于配铸铁底座 This table is only subject to cast iron bedplate

型号 Model	泵安装尺寸 Dimension of installation of pump set													吸入锥管 Suction conic						吐出锥管 Discharge conic						电机 Motor		总重 (kg) Weight of pump set							
	A	L	L ₁	L ₂	L ₃	L ₄	L ₅	B	B ₁	H	H ₁	H ₂	b	b ₁	b ₂	b ₃	b ₄	C	φd	I ₁	φD _{g1}	φD	φD ₁	φD ₂	n-φd ₁	I ₂	φD _{g2}		φD	φD ₁	φD ₂	n-φD ₂	型号 Model	功率 kW	
XA32/13	80	753	170	490	790	305		350	350	327	187	80	25					2 18.5															Y801-4	0.55	65
XA32/16	80	754	170	490	790	305		350	350	367	207	80	25					2 18.5															Y801-4	0.55	75
XA32/20	80	775	170	490	780	330		350	350	395	215	90	20					2 18.5															Y90S-4	1.1	85
XA32/26	95	863	170	490	830	395		400	400	450	235	100	20					2 18.5															Y100L2-4	3	100
XA40/13	80	753	170	490	790	305		350	350	327	187	80	25					2 18.5															Y801-4	0.55	66
XA40/16	80	780	170	490	790	330		350	350	347	187	90	20					2 18.5															Y90S-4	1.1	75
XA40/20	80	823	170	490	790	355		350	350	395	215	90	20					2 18.5															Y90L-4	1.5	92
XA40/26	95	864	170	490	830	395		400	400	460	235	100	20			20	18	2	18.5								120	65	122	145	185	4-17.5	Y100L2-4	3	102
XA40/32	110	1082	150	830	1120	480		550	550	540	290	132	30			20	18	2	19								120	65	122	145	185	4-17.5	Y132S-4	5.5	205
XA40/32A	110	1082	150	830	1120	480		550	550	540	290	132	30														120	65	122	145	185	4-17.5	Y132S-4	5.5	205
XA40/32B	110	1082	150	830	1120	480		550	550	540	290	132	30			20	18	2	19								120	65	122	145	185	4-17.5	Y132S-4	5.5	205
XA50/13	80	799	170	490	790	330		350	350	347	187	90	20	22	20	20	20	2	18.5	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y90S-4	1.1	77	
XA50/16	80	823	170	490	830	355		350	350	395	215	90	20	22	20	20	20	2	18.5	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y90L-4	1.5	84	
XA50/20	95	864	170	490	830	395		400	400	415	215	100	20	22	20	20	20	2	18.5	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y100L1-4	2.2	107	
XA50/26	95	948	170	490	830	480		400	400	460	235	132	20	22	20	20	20	2	18.5	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y132S-4	5.5	165	
XA50/32	110	1233	150	830	1120	628		550	550	595	315	160	30	22	20	20	20	2	19	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y160M-4	11	293	
XA50/32A	110	1125	150	830	1120	520		550	550	595	315	132	30	22	20	20	20	2	19	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y132M-4	7.5	244	
XA50/32B	110	1125	150	830	1120	520		550	550	595	315	132	30	22	20	20	20	2	19	120	80	133	160	200	8-17.5	120	65	122	145	185	4-17.5	Y132M-4	7.5	244	
XA65/13	80	827	170	490	790	355		350	350	395	215	90	20	24	22	22	20	2	18.5	150	100	158	180	220	8-17.5	120	80	133	160	200	8-17.5	Y90L-4	1.5	95	
XA65/16	95	869	170	490	830	395		400	400	415	215	100	20	24	22	22	20	2	18.5	150	100	158	210	250	8-17.5	120	80	133	160	200	8-17.5	Y100L1-4	2.2	105	
XA65/20	95	887	170	490	830	410		400	400	460	235	112	20	26	24	22	20	2	18.5	200	125	184	210	250	8-17.5	120	80	133	160	200	8-17.5	Y112M-4	4	140	
XA65/26	110	1096	150	830	1120	520		550	550	540	290	132	30	26	24	22	20	2	19	200	125	184	210	250	8-17.5	120	80	133	160	200	8-17.5	Y132M-4	7.5	204	
XA65/32	110	1287	150	830	1120	683		550	550	595	315	160	30	26	24	22	20	2	19	200	125	184	210	250	8-17.5	120	80	133	160	200	8-17.5	Y160L-4	15	329	
XA65/32A	110	1232	150	830	1120	628		550	550	595	315	160	30	26	24	22	20	2	19	200	125	184	210	250	8-17.5	120	80	133	160	200	8-17.5	Y160M-4	11	329	
XA65/32B	110	1232	150	830	1120	628		550	550	595	315	160	30	26	24	22	20	2	19	200	125	184	210	250	8-17.5	120	80	133	160	200	8-17.5	Y160M-4	11	318	
XA80/16	95	895	170	490	830	395		400	400	460	235	100	20	26	24	24	22	2	18.5	220	150	212	240	285	8-22	150	100	158	180	220	8-22	Y100L2-4	3	120	
XA80/20	110	1121	150	830	1120	520		550	550	520	270	132	30	26	24	24	22	2	19	220	150	212	240	285	8-22	150	100	158	180	220	8-17.5	Y132M-4	7.5	192	
XA80/26	110	1237	150	830	1120	628		550	550	570	290	160	30	26	24	24	22	2	19	220	150	212	240	285	8-22	150	100	158	180	220	8-17.5	Y160M-4	101	224	

泵安装尺寸 TABLE OF INSTALLION DIMENSIONS OF PUMP(见图3 see fig.3)
n=1450rpm 本表只适用于配铸铁底座 This table is only subject to cast iron bedplate

型号 Model	泵安装尺寸 Dimension of installation of pump set																			吸入锥管 Suction conic					吐出锥管 Discharge conic					电机 Motor		总重 (kg) Weight of pump set		
	A	L	L ₁	L ₂	L ₃	L ₄	L ₅	B	B ₁	H	H ₁	H ₂	b	b ₁	b ₂	b ₃	b ₄	C	Φd	l ₁	ΦD _{G1}	ΦD	ΦD ₁	ΦD ₂	n-Φd ₁	l ₂	ΦD _{G2}	ΦD	ΦD ₁	ΦD ₂	n-Φd ₂		型号 Model	功率 kW
XA80/32	100	1313	200	780	1180	715		500	500	655	340	180	30	26	24	24	22	2	19	150	125	184	210	250	8-17.5	150	100	158	180	220	8-17.5	Y180M-4	18.5	395
XA80/32A	110	1281	150	830	1120	683		550	550	655	340	160	30	26	24	24	22	2	19	150	125	184	210	250	8-17.5	150	100	158	180	220	8-17.5	Y160L-4	15	339
XA80/32B	110	1281	150	830	1120	683		550	550	655	340	160	30	26	24	24	22	2	19	150	125	184	210	250	8-17.5	150	100	158	180	220	8-17.5	Y160L-4	15	339
XA80/40	130	1430	290	870	1430	785		600	600	785	430	200	40	26	24	24	22	2	28	150	125	184	210	250	8-17.5	150	100	158	180	220	8-17.5	Y200L-4	30	480
XA80/40A	130	1445	290	870	1430	785		600	600	785	430	200	40	26	24	24	22	2	28	150	125	184	210	250	8-17.5	150	100	158	180	220	8-17.5	Y200L-4	30	480
XA80/40B	130	1445	290	870	1430	785		600	600	785	430	200	40	26	24	24	22	2	28	150	125	184	210	250	8-17.5	150	100	158	180	220	8-17.5	Y200L-4	30	480
XA100/16	110	1084	150	830	1120	480		550	550	540	290	132	30	23	23	23	22	2	19	150	150	210	240	280	8-22	150	125	184	210	250	8-17.5	Y132S-4	5.5	440
XA100/20	110	1231	150	830	1430	628		550	550	570	290	160	30	26	26	26	21	2	19	330	200	268	295	340	8-22	150	125	184	210	250	8-17.5	Y160M-4	11	218
XA100/26	110	1302	150	830	1120	683		550	550	595	315	160	30	26	26	26	24	2	19	330	200	268	295	340	8-22	150	125	184	210	250	8-17.5	Y160L-4	15	319
XA100/32	100	1372	200	780	1180	755		500	500	655	340	180	30	26	26	26	24	2	19	175	150	212	240	285	8-22	150	125	184	210	250	8-17.5	Y180L-4	22	418
XA100/32A	100	1372	200	780	1180	755		500	500	655	340	180	30	26	26	26	24	2	19	175	150	212	240	285	8-22	150	125	184	210	250	8-17.5	Y180L-4	22	418
XA100/32B	100	1332	200	780	1180	715		500	500	655	340	180	30	26	26	26	24	2	19	175	150	212	240	285	8-22	150	125	184	210	250	8-17.5	Y180M-4	18.5	400
XA100/40	130	1535	290	870	1430	860		600	600	785	430	225	40	26	26	26	24	2	28	175	150	212	240	285	8-22	150	125	184	210	250	8-17.5	Y225M-4	45	603
XA100/40A	130	1505	290	870	1430	830		600	600	785	430	225	40	26	26	26	24	2	28	175	150	212	240	285	8-22	150	125	184	210	250	8-17.5	Y225S-4	37	567
XA100/40B	130	1505	290	870	1430	830		600	600	785	430	225	40	26	26	26	24	2	28	175	150	212	240	285	8-22	150	125	184	210	250	8-17.5	Y225M-4	37	567
XA125/20	110	1248	150	830	1120	628		550	550	655	340	160	30	26	26	26	24	2	19	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y160M-4	11	308
XA125/26	100	1374	200	780	1180	755		500	500	695	340	180	30	26	26	26	26	2	19	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y180L-4	22	400
XA125/26A	100	1374	200	780	1180	755		500	500	695	340	180	30	26	26	26	26	2	19	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y180L-4	22	400
XA125/26B	100	1334	200	780	1180	715		500	500	695	340	180	30	26	26	26	26	2	19	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y180M-4	18.5	320
XA125/32	130	1469	290	870	1180	785		600	600	785	430	200	40	30	26	26	26	2	28	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y200L-4	30	514
XA125/32A	130	1469	290	870	1180	785		600	600	785	430	200	40	30	26	26	26	2	28	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y200L-4	30	514
XA125/32B	130	1439	290	870	1180	755		600	600	785	370	180	40	30	26	26	26	2	28	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y180L-4	22	454
XA125/40	130	1660	320	900	1540	985		670	670	865	465	280	40	30	26	26	26	4	28	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y280S-4	75	896
XA125/40A	130	1590	320	900	1540	915		670	670	865	465	250	40	30	26	26	26	4	28	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y250M-4	55	712
XA125/40B	130	1590	320	900	1540	915		670	670	865	465	250	40	30	26	26	26	4	28	350	200	268	295	340	12-22	175	150	212	240	285	8-22	Y250M-4	55	712
XA150/20	100	1378	200	780	1180	715		500	500	770	370	180	30	32	30	30	26	2	19	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y180M-4	18.5	406
XA150/26	130	1488	290	870	1430	785		600	600	755	400	200	40	32	30	30	26	2	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y200L-4	30	498
XA150/32	130	1619	320	900	1540	915		670	670	830	430	250	40	32	30	30	26	4	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y250M-4	55	716
XA150/32A	130	1567	320	900	1540	860		670	670	830	430	225	40	32	30	30	26	2	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y225M-4	45	619
XA150/32B	130	1537	320	900	1540	830		670	670	830	430	225	40	32	30	30	26	2	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y225S-4	37	584
XA150/40	130	1734	320	900	1540	1035		670	670	915	465	280	40	32	30	30	26	4	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y280M-4	90	939
XA150/40A	130	1684	320	900	1540	985		670	670	915	465	280	40	32	30	30	26	4	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y280S-4	75	924
XA150/40B	130	1684	320	900	1540	985		670	670	915	465	280	40	32	30	30	26	4	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y280S-4	75	924
XA150/50	160	2246	320	1260	1900	1330		750	1010	520	315	40	32	30	30	26	4	28	350	250	320	355	405	12-26	350	200	268	295	340	12-22	Y315M-4	132	1285	
XA200/30	130	1814	320	1070	1700	915		670	900	46																								



全国统一服务热线 400 604 3398

地 址：广州市海珠区科韵南路133号
生产中心地址：佛山市南海区红岭路2号之一
销售部电话：(020) 66834613 66834616 66834618
技术咨询：(0757) 81093982
维修部电话：(020) 66834630 66834631
服务投诉：(020) 66834612

传 真：(020) 66834619 66834629
E - mail: sales@gygcn.com
网 址 URL: www.gypump.com

说明书内容如有改动，恕不另行通知
All specifications subject to change without notice

A - XA20150301